


A

B


C

D

E

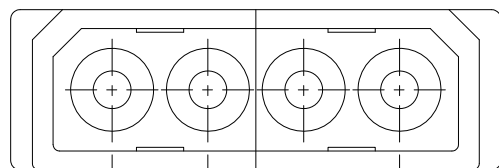

5.08  
15.24

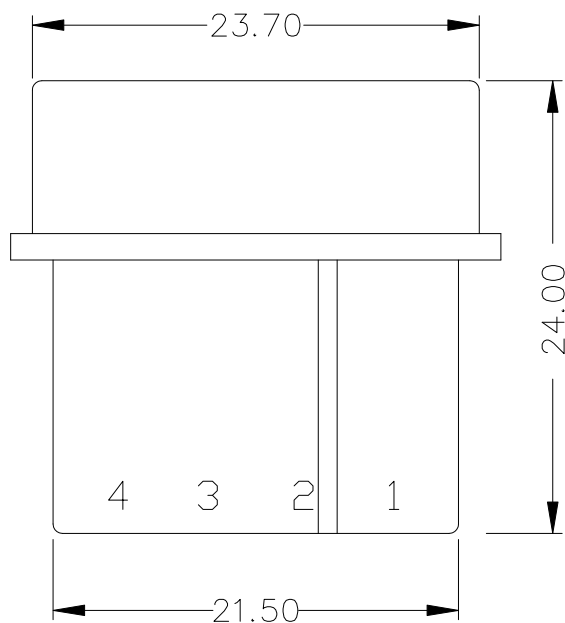


23.70

24.00

4 3 2 1

21.50

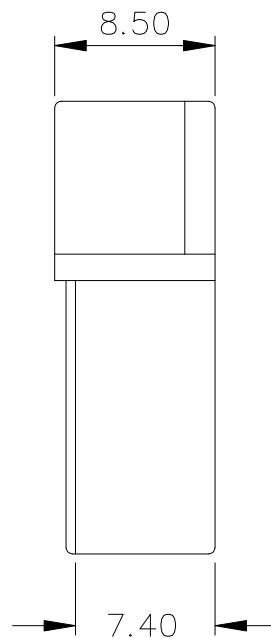

8.50

7.40

## SPECIFICATIONS

### Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ / min.

Dielectric Withstanding Voltage: 1500V AC / min.

Contact Resistance: 10mΩ / max.

### Material

Material: Nylon66, UL94V-2



承洧科技股份有限公司  
Cherg Wee Technology Corp.

DESCRIPTION(內容):

5.08mm Wire-to-Board Housing

PART NO:  
(料號) C4-1114-04F

DWG NO(圖號): 2441-04

DRAWN(製圖):  
GONG

CHECKED(確認):  
TERESA

APPROVAL(核准):  
JOHNNY

GENERAL TOLERANCE:  
(公差)

X.XX ± 0.25  
X.X ± 0.5

SCALE(比例):  
FREE



REV:  
R0

UNIT:  
mm

SIZE:  
A4

SHEET:  
1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2015.12.09

A

B

C

D

E

CF091