
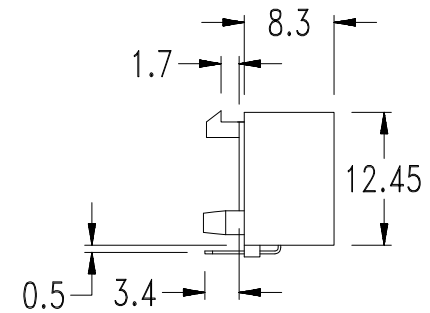


Features:

- Plastic: UL 94V-2 nylon 66
- Pin: Tin-plated phosphor bronze, 0.25mm thickness

Specification:

- Current rating: 6.5A
- Voltage rating: 250V AC (R.M.S.)
- Contact resistance: 10mΩ Max.
- Insulation resistance: 500MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

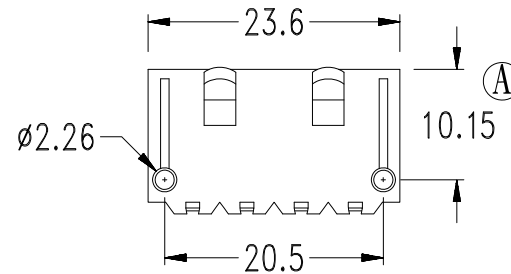

CHERNG WEEI

DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE:(公差)	REV: R3	REV	DESCRIPTION	DATE
.200"(5.08mm) Right Angle Header(RoHS)	Larry	.00 ±0.25 .0 ±0.40	UNIT:	R0	環保料	2005.12.28
	CHECKED(確認):		mm	R1		2006.08.08
PART NO: (料號) C4-1114-04WR	MANDY	SCALE(比例):	SIZE: A4	R2	2008年圖面版本更新	2008.03.13
DWG NO(圖號): 9090-04R	JOHNNY	1:XX	SHEET: 1/1	R3	新增 Ⓐ 尺寸	2014.02.18