



P.C.B LAYOUT




SPECIFICATIONS

Curent Rating: 3A AC, DC
 Voltage Rating: 500V AC, DC
 Temperature Range: -25° C ~ +85° C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0


7P~15P

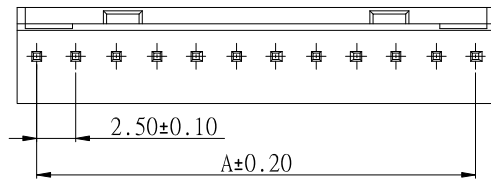


2P, 3P




4P~6P





B±0.25

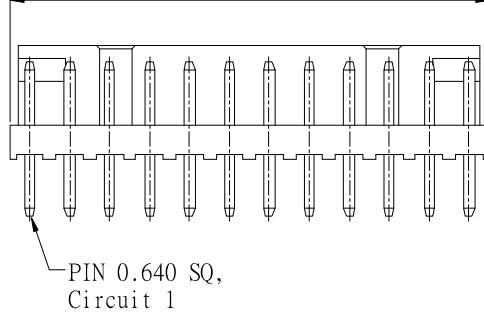

B±0.25



B±0.25

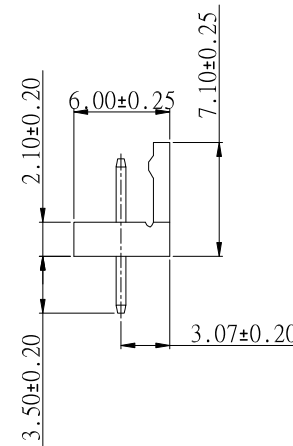

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CAE-W250-02-CF194	2.50	5.00
CAE-W250-03-CF194	5.00	7.50
CAE-W250-04-CF194	7.50	10.00
CAE-W250-05-CF194	10.00	12.50
CAE-W250-06-CF194	12.50	15.00
CAE-W250-07-CF194	15.00	17.50
CAE-W250-08-CF194	17.50	20.00
CAE-W250-09-CF194	20.00	22.50
CAE-W250-10-CF194	22.50	25.00
CAE-W250-11-CF194	25.00	27.50
CAE-W250-12-CF194	27.50	30.00
CAE-W250-13-CF194	30.00	32.50
CAE-W250-14-CF194	32.50	35.00
CAE-W250-15-CF194	35.00	37.50



DESCRIPTION(內容):
 2.50mm PITCH 180° WAFER (RoHS)
 PART NO: CAE-W250-XX-CF194
 DWG NO(圖號): A2500WV-XP

DRAWN(製圖): GONG
 CHECKED(確認): TERESA
 APPROVAL(核准): JOHNNY

GENERAL TOLERANCE: (公差)
 X.X ±0.25
 X.XX ±0.15
 X.XXX ±0.05
 SCALE(比例): FREE

REV: R3
 UNIT: mm
 SIZE: A4
 SHEET: 1/1

REV	DESCRIPTION	DATE
R0	RELEASE 導入RoHS	2006.03.29 2006.07.07
R1	變更環保章字樣 變更PART NO.	2006.08.17 2006.09.29
R2	NEW RELEASE	2010.02.01
R3	圖面更新	2016.08.01