





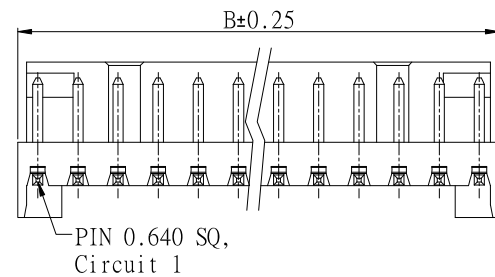
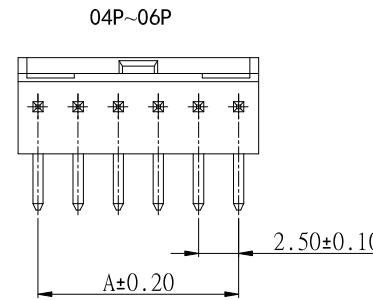


P.C.B LAYOUT



SPECIFICATIONS

Current Rating: 3A AC, DC
 Voltage Rating: 500V AC, DC
 Temperature Range: -25° C ~ +85° C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: 153c

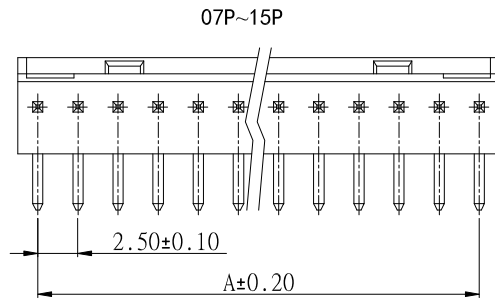

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CAE-W250R-02-CF194	2.50	5.00
CAE-W250R-03-CF194	5.00	7.50
CAE-W250R-04-CF194	7.50	10.00
CAE-W250R-05-CF194	10.00	12.50
CAE-W250R-06-CF194	12.50	15.00
CAE-W250R-07-CF194	15.00	17.50
CAE-W250R-08-CF194	17.50	20.00
CAE-W250R-09-CF194	20.00	22.50
CAE-W250R-10-CF194	22.50	25.00
CAE-W250R-11-CF194	25.00	27.50
CAE-W250R-12-CF194	27.50	30.00
CAE-W250R-13-CF194	30.00	32.50
CAE-W250R-14-CF194	32.50	35.00
CAE-W250R-15-CF194	35.00	37.50



DESCRIPTION(內容):
 2.50mm PITCH 90° WAFER (RoHS)
PART NO: CAE-W250R-XX-CF194
DWG NO(圖號): A2500WR-XP

DRAWN(製圖): GONG
CHECKED(確認): TERESA
APPROVAL(核准): JOHNNY

GENERAL TOLERANCE: (公差)
 X.X ±0.25
 X.XX ±0.15
 X.XXX ±0.05
SCALE(比例): FREE

REV: R3
UNIT: mm
SIZE: A4
SHEET: 1/1

REV	DESCRIPTION	DATE
R0	RELEASE 導入RoHS	2006.03.29 2006.07.07
R1	變更環保章字樣 變更PART NO.	2006.08.17 2006.09.29
R2	NEW RELEASE	2010.02.01
R3	2014年8月料號P數編碼統一兩碼	2018.04.30