
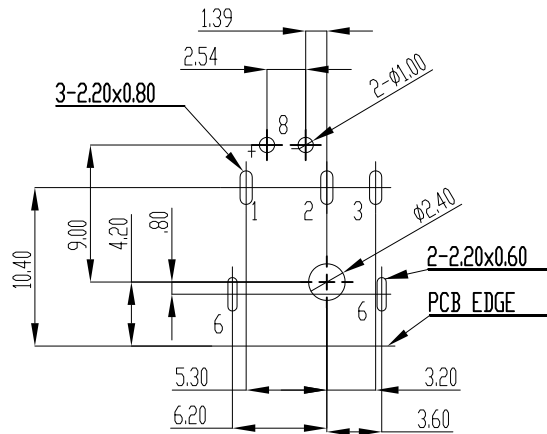
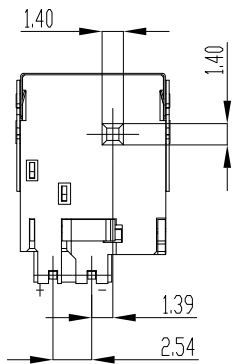


SPECIFICATION:

1. VOLTAGE RATING: 24V & 5A
2. CONTACT RESISTANCE :30m Ω (MAX)
3. INSULATION RESISTANCE :100MΩ MIN, DC250V
4. OPERATION TEMPERATURE: -25°C~90°C
5. WITHSTAND VOLTAGE:500VAC
6. INSERTION FORCE :3Kgf (MAX)
7. EXTRACTION FORCE :0.3Kgf (MIN)
8. LIFE TESTING:5000 CYCLES
9. SOLDERING PROCES:PARTS WILL WITHSTAND 260°C/5SEC
10. EIAJ RC-53220A COMPLANT
11. ROHS 6/6 COMPLIANT



T=1.60mm Dimensions of PC board holes
Top View Tolerance : ±0.05mm

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
8	LED	1	—	GREEN	571nm WAVELENGTH
7	HOUSING	1	PA9T	—	UL-94V0
6	SHELL 2	1	BRASS	—	Tin PLATING
5	SHELL 1	1	SUS301	—	Tin PLATING
4	TERMINAL 4	1	SUS301	—	Tin PLATING
3	TERMINAL 3	1	BRASS	—	Tin PLATING
2	TERMINAL 2	1	BRASS	—	Tin PLATING
1	TERMINAL 1	1	BRONZE	—	Tin PLATING