
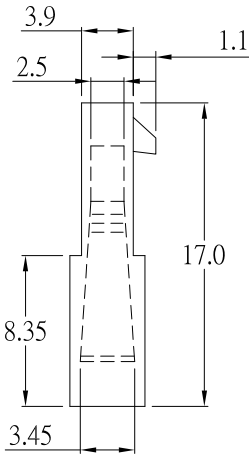


Specifications:

Material: Polyester, UL 94V-0.
 Voltage Rating: 250V.
 Current Rating: 5A.
 Withstand Voltage: 1500V AC/Minute.
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25°C ~ +85°C.
 Contact Resistance: Initial value/10mΩ max.
 After environmental testing/20mΩ max.
 Standard Color: Black.

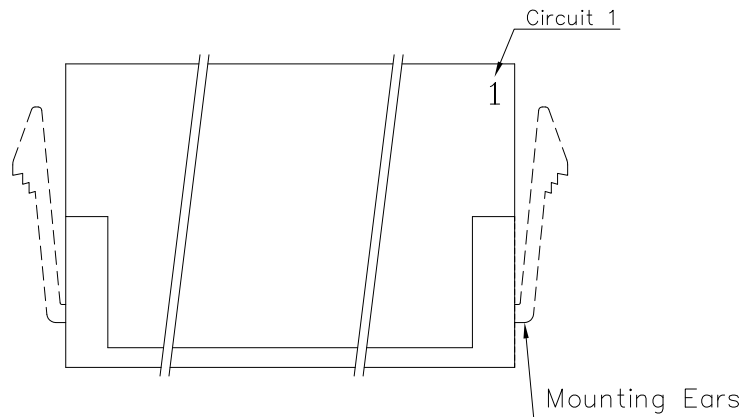

Dimensional & Ordering Information:

Circuits	Part No.		Dimensions mm			
	Without Mounting Ears	With Mounting Ears	A	B	C	D
02	CMF-H300F1-1x02	CMF-H300F-1x02	3.00	6.85	7.21	10.90
03	CMF-H300F1-1x03	CMF-H300F-1x03	6.00	9.85	10.21	13.89
04	CMF-H300F1-1x04	CMF-H300F-1x04	9.00	12.85	13.21	16.89
05	CMF-H300F1-1x05	CMF-H300F-1x05	12.00	15.85	16.21	19.89
06	CMF-H300F1-1x06	CMF-H300F-1x06	15.00	18.85	19.21	22.89
07	CMF-H300F1-1x07	CMF-H300F-1x07	18.00	21.85	22.20	25.88
08	CMF-H300F1-1x08	CMF-H300F-1x08	21.00	24.85	25.20	28.88
09	CMF-H300F1-1x09	CMF-H300F-1x09	24.00	27.85	28.20	31.88
10	CMF-H300F1-1x10	CMF-H300F-1x10	27.00	30.85	31.22	34.87
11	CMF-H300F1-1x11	CMF-H300F-1x11	30.00	33.85	34.22	37.87
12	CMF-H300F1-1x12	CMF-H300F-1x12	33.00	36.85	37.22	40.87



DESCRIPTION(內容):
**3.0mm (.118") Micro-Fit
 Connentor / Plug (RoHS)**

PART NO:
 (料號) **CMF-H300FX-1xXX**
 DWG NO(圖號): **5850-H-1X**

DRAWN(製圖):
GONG
 CHECKED(確認):
MANDY
 APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
 (公差)
 .000 ±0.08
 .00 ±0.13
 .0 ±0.25

SCALE(比例):
FREE

REV:
R2
 UNIT:
mm
 SIZE:
A4
 SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2009.12.17
R1	2014年8月料號P數編碼統一兩碼	2015.01.21
R2	更換確認章	2019.09.02
R3		