



Specifications:

Material: Polyester, UL 94V-0.

Voltage Rating: 250V.

Current Rating: 5A.

Withstand Voltage: 1500V AC/Minute.

Insulation Resistance: 1000MΩ min.



Temperature Range: -25°C ~ +85°C.

Contact Resistance: Initial value/10mΩ max.

After environmental testing/20mΩ max.


Standard Color: Black.

Recommended Panel Thickness: 1.60

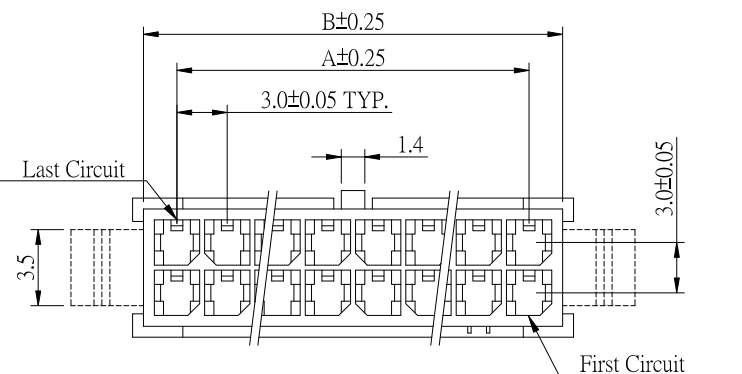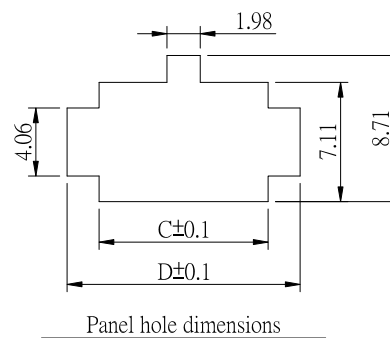

Dimensional & Ordering Information:

Circuits	Part NO.		Dimensions (mm)			
	With Mounting Ears	Without Mounting Ears	A	B	C	D
02	CMF-H300F-2X01	CMF-H300F1-2X01		3.9	4.21	7.90
04	CMF-H300F-2X02	CMF-H300F1-2X02	3.00	7.0	7.39	11.03
06	CMF-H300F-2X03	CMF-H300F1-2X03	6.00	10.0	10.36	14.03
08	CMF-H300F-2X04	CMF-H300F1-2X04	9.00	13.0	13.36	17.03
10	CMF-H300F-2X05	CMF-H300F1-2X05	12.00	16.0	16.36	20.03
12	CMF-H300F-2X06	CMF-H300F1-2X06	15.00	19.0	19.36	23.03
14	CMF-H300F-2X07	CMF-H300F1-2X07	18.00	22.0	22.36	26.03
16	CMF-H300F-2X08	CMF-H300F1-2X08	21.00	25.2	25.56	29.22
18	CMF-H300F-2X09	CMF-H300F1-2X09	24.00	28.2	28.56	32.22
20	CMF-H300F-2X10	CMF-H300F1-2X10	27.00	31.2	31.56	35.22
22	CMF-H300F-2X11	CMF-H300F1-2X11	30.00	34.2	34.56	38.22
24	CMF-H300F-2X12	CMF-H300F1-2X12	33.00	37.2	37.56	41.22

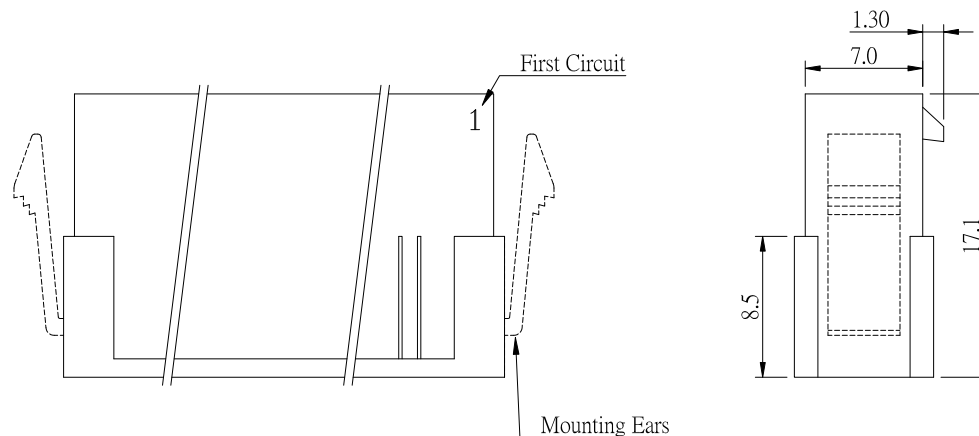

DESCRIPTION(內容):
3.0mm (.118") Micro-Fit Connentor / Plug(RoHS)

PART NO:
 (料號) **CMF-H300FX-2xXX**

DWG NO(圖號): **5850-H**

DRAWN(製圖):
GONG

CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
 (公差)

.X ±0.25
 .XX ±0.15

SCALE(比例):
FREE

REV:
R1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2012.02.23
R1	2014年8月料號P數編碼統一兩碼	2015.01.21
R2		
R3		