
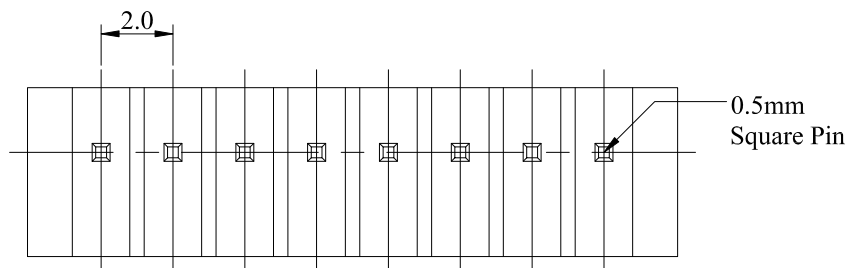
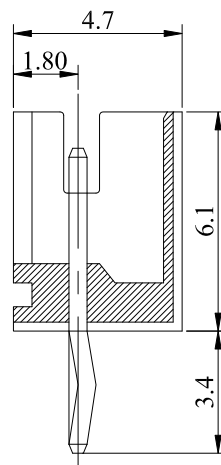


RECOMMENDED P.C. BOARD HOLE DIMM.

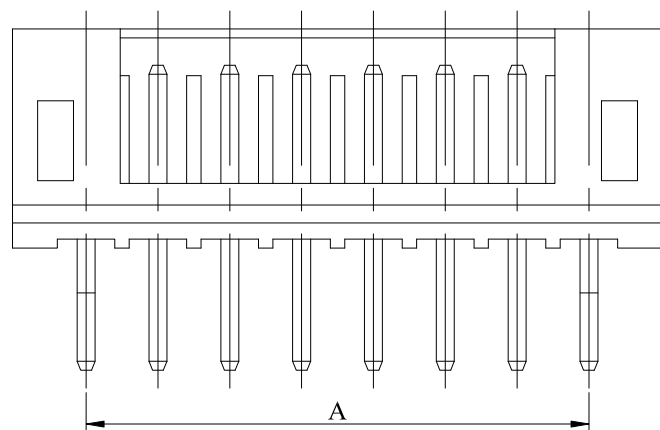

Specifications

Electrical

Voltage Rating: 100V(AC)

Current Rating: 2A

Contact Resistance: 20m Ω max.

Dielectric Withstandeing Voltage: 800V AC/1min.

Insulation Resistance: 1000M Ω min.

Material

Circuits: 2~16

Insulator: Nylon 66 UL 94V-0

Color: White

Contact: Brass 0.50mm(0.20") Square Pin

Plating: Tin Plated

Temperature Range: -25°C~+85°C

Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
02	2.0(0.079)	6.1(0.240)	CP-W20-02	
03	4.0(0.157)	8.1(0.318)	CP-W20-03	
04	6.0(0.236)	10.1(0.397)	CP-W20-04	
05	8.0(0.315)	12.1(0.476)	CP-W20-05	
06	10.0(0.394)	14.1(0.555)	CP-W20-06	
07	12.0(0.472)	16.1(0.634)	CP-W20-07	
08	14.0(0.551)	18.1(0.713)	CP-W20-08	
09	16.0(0.630)	20.1(0.791)	CP-W20-09	
10	18.0(0.709)	22.1(0.870)	CP-W20-10	
11	20.0(0.787)	24.1(0.949)	CP-W20-11	
12	22.0(0.886)	26.1(1.028)	CP-W20-12	
13	24.0(0.945)	28.1(1.106)	CP-W20-13	
14	26.0(1.024)	30.1(1.185)	CP-W20-14	
15	28.0(1.102)	32.1(1.263)	CP-W20-15	
16	30.0(1.181)	34.1(1.343)	CP-W20-16	



承洧科技股份有限公司
Cherg Weei Technology Corp.

DESCRIPTION(內容):
2.0mm Wire-to-Board Header
DIP 180° Type (RoHS)

PART NO: CP-W20-XX
DWG NO(圖號): 2001J-XX-ST

DRAWN(製圖): GONG
CHECKED(確認): TERESA

APPROVAL(核准): JOHNNY

GENERAL TOLERANCE:(公差)
X.XX ± 0.2
X.X ± 0.3

SCALE(比例): FREE

REV: R4
UNIT: mm
SIZE: A4
SHEET: 1/1

REV: R0
R1
R2
R3
R4

DESCRIPTION: 環保料, 更改環保章字樣, 補充尺寸, 補充(A)尺寸, 圖面更新

DATE: 2006.03.20, 2006.06.29, 2006.09.11, 2007.04.19, 2008.05.08, 2016.01.13