

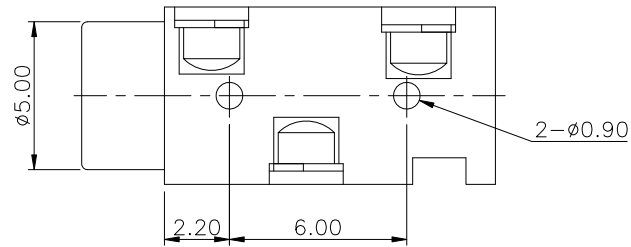


P.C.B LAYOUT
TOP VIEW

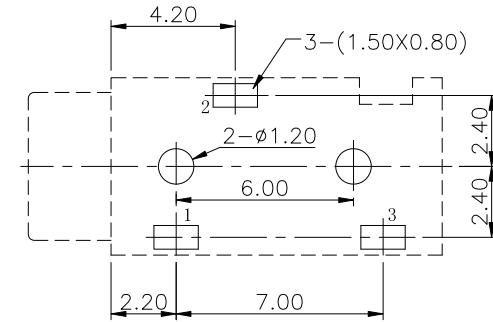

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
4	HOUSING	1	PBT	—	—
3	CONTACT FOOT	1	PHOSPHOR BRONZE	—	Sn-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	—	Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	—	Sn-Plating



DESCRIPTION(內容):
PHONE JACK (RoHS)

PART NO:
(料 號) **CPJ-D3020**
DWG NO(圖號): **PJ-D3020**

DRAWN(製圖):
MIMI
CHECKED(確認):
MANDY
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:(公差)
XX ± 0.30
XXX ± 0.20
SCALE(比例):
FREE

REV:
R0
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2013.11.07
R1		
R2		
R3		