



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance : $\leq 0.03\Omega$;
3. Insulation resistance : $\geq 100M\Omega$ (DC250V);
4. Withstand voltage : 500V AC ;
5. Insertion and extraction force : 3-30N;
6. life test : 5,000 cycles.

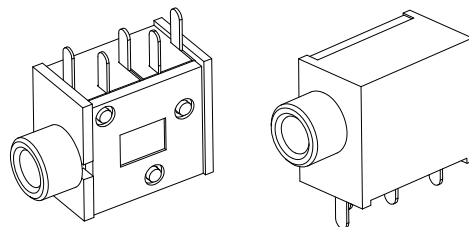

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
8	COVER	1	PBT	——
7	HOUSING	1	PBT	——
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	CURVE PIECE	1	BRASS	Sn-Plating
4	SPRING PIECE	1	BRONZE	Sn-Plating
3	CURVE PIECE	1	BRASS	Sn-Plating
2	SPRING PIECE	1	BRONZE	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating

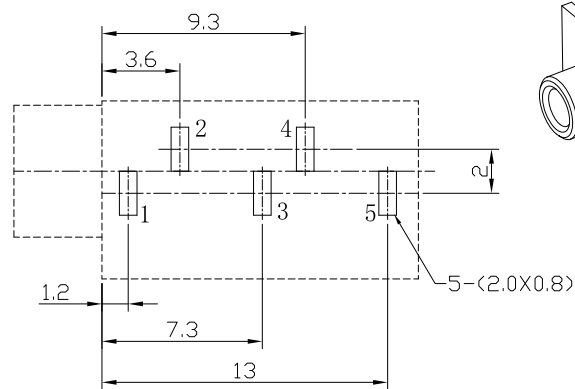

P.C.B LAYOUT
TOP VIEW



SCHMATIC	CPJ-D3025C	CPJ-D3025C-1	CPJ-D3025C-2	CPJ-D3025C-3	CPJ-D3025C-4



DESCRIPTION(內容):
PHONE JACK(RoHS)

DRAWN(製圖):
Larry

CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

PART NO:
(料號) CPJ-D3025C-X

DWG NO(圖號): PJ-D3025C(NEW)

GENERAL TOLERANCE:(公差)
General X ±0.50
XX ±0.30
XXX ±0.20
XXX ±0.10

Angle X '± 3'
XX '± 2'
XXX '± 1'

SCALE(比例):
FREE

REV:	REV	DESCRIPTION	DATE
R1	R0	RELEASE	2014.01.22
	R1	更換確認章	2019.07.30
	R2		
	R3		