



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

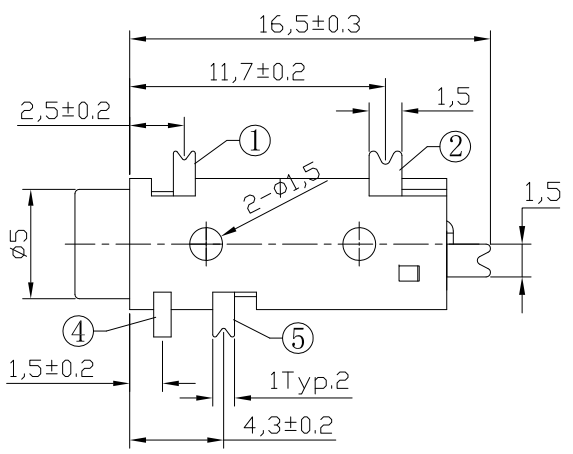

SCHMATIC

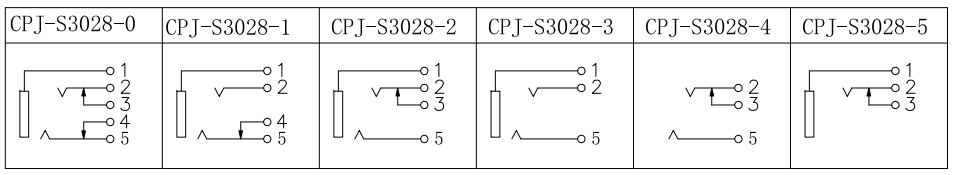

7	COVING	1	PA9T	
6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	SUS301	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	Ag-Plating
3	3# CONTACT FOOT	1	BRASS	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	SUS301	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



DESCRIPTION(内容):
PHONE JACK (RoHS)

DRAWN(製圖): Larry
CHECKED(確認): MANDY
APPROVAL(核准): JOHNNY

PART NO: (料號) **CPJ-S3028-X**
DWG NO(圖號):

GENERAL TOLERANCE: (公差)
 ± 0.15 $\pm 1.5^\circ$

SCALE(比例): 1:XX

REV: A/3	REV	DESCRIPTION	DATE
UNIT: mm	1		2011.09.21
SIZE: A4	2	變更料號(原: CWPJ-S3028-X)	2013.11.14
SHEET: 1/1	3	更換確認章	2019.07.30
	4		