
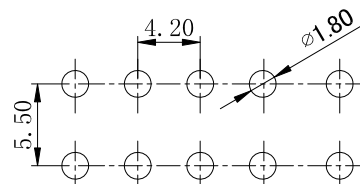




B ± 0.35 (2X01P-2X06P)
B ± 0.55 (2X07P-2X12P)

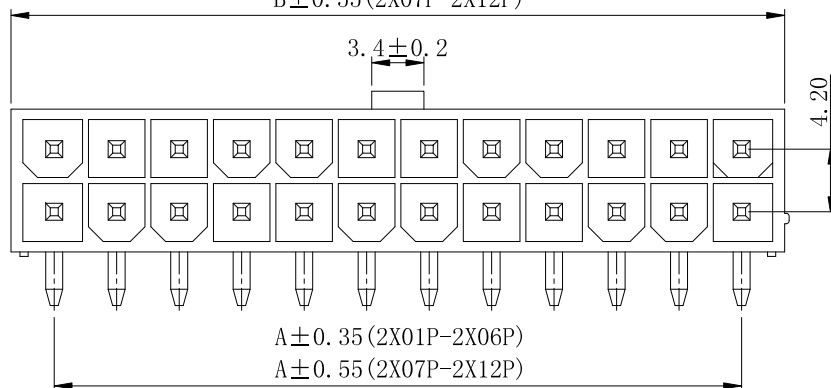

P.C.B Hole Layout

SPECIFICATIONS

Current Rating	: 9A AC, DC
Voltage Rating	: 600V AC, DC
Temperature Range	: -25° C ~ +85° C
Contact Resistance	: 10mΩ Max
Insulation Resistance	: 1000MΩ Min
Withstanding Voltage	: 1500V AC/minute
Pin Material	: Brass/Tin-Plated
Material	: Nylon-66, UL94V-2
Color	: Translucence

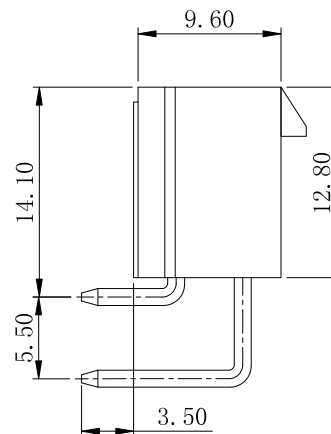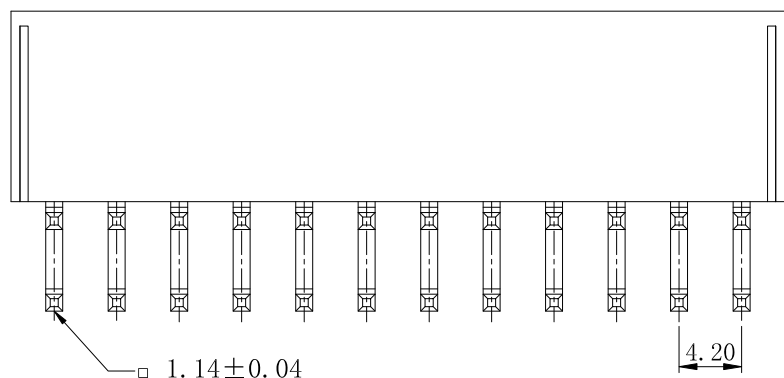

PART NO.	A	B
CR-W421-02	---	5.40
CR-W421-04	4.20	9.60
CR-W421-06	8.40	13.80
CR-W421-08	12.60	18.00
CR-W421-10	16.80	22.20
CR-W421-12	21.00	26.40
CR-W421-14	25.20	30.60
CR-W421-16	29.40	34.80
CR-W421-18	33.60	39.00
CR-W421-20	37.80	43.20
CR-W421-22	42.00	47.40
CR-W421-24	46.20	51.60



DESCRIPTION(内容):

Mini-Fit 4.2mm Pitch 90°(RoHS)

PART NO:
(料 號)

CR-W421-XX

DWG NO(圖號):

DRAWN(製圖):

黃炳秋

CHECKED(確認):

黃炳秋

APPROVAL(核准):

鄧文廣

GENERAL TOLERANCE:
(公差)

.0 ±0.40
.00 ±0.25

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

DATE

2017. 06. 21

A

B

C

D

E

FILE NO: CWJ-4E-09