
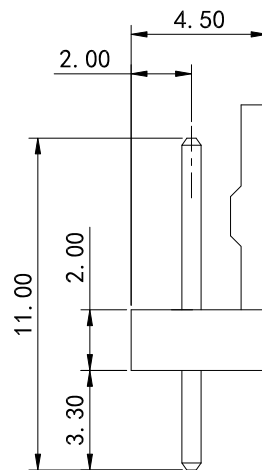


PCB LAYOUT COMPONENT SIDE

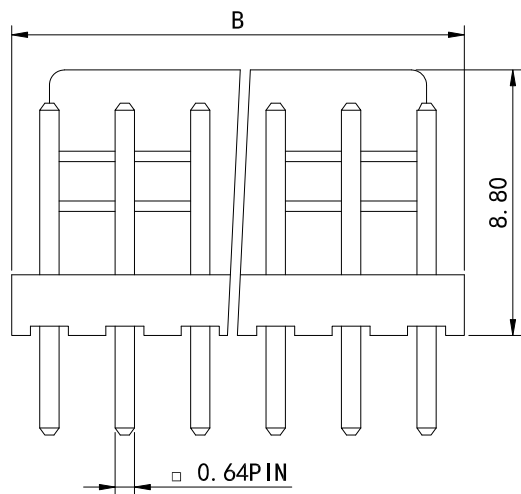

SPECIFICATIONS

Current rating : 2A AC, DC

Voltage rating : 250V AC, DC

Temperature range : -25°C to $+85^{\circ}\text{C}$

Contact resistance : $20\text{m}\Omega$ Max.

Insulation resistance : $1000\text{M}\Omega$ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-2

Terminal Material : Brass/Tin-Plated

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2	2.50	5.10	CS-W250-2	
3	5.00	7.60	CS-W250-3	
4	7.50	10.10	CS-W250-4	
5	10.00	12.60	CS-W250-5	
6	12.50	15.10	CS-W250-6	
7	15.00	17.60	CS-W250-7	
8	17.50	20.10	CS-W250-8	
9	20.00	22.60	CS-W250-9	
10	22.50	25.10	CS-W250-10	



承洧科技股份有限公司
Cherg Weei Technology Corp.

DESCRIPTION(內容):
2.5mm Wire-to-Board Header
Dip 180° Type

PART NO:
(料 號) CS-W250-XX
DWG NO(圖號): 2501-XX-ST

DRAWN(製圖):
mimi
CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
X.XX ± 0.2
X.X ± 0.3

SCALE(比例):
FREE

REV:
R5
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV
R2
R3
R4
R5

DESCRIPTION
13-20Pin停產
11-12Pin停產
更換確認章
新增銅材描述

DATE
2010.01.21
2011.01.17
2019.03.13
2019.03.20