



**SPECIFICATIONS**

Current rating : 3.0A AC, DC  
 Voltage rating : 250V AC, DC  
 Temperature range : -25°C to +85°C  
 Contact resistance : 20mΩ Max.  
 Insulation resistance : 1000MΩ Min.  
 Withstanding voltage : 800V AC/minute  
 Material : Nylon 66, UL94V-0

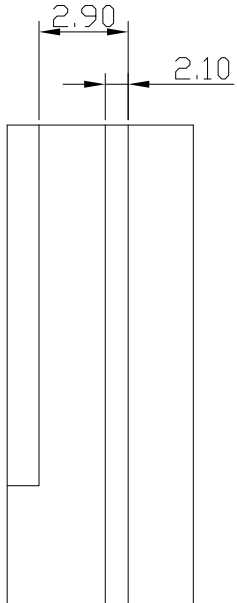

Part NO.	Dim(mm)
	A
CS4-H1114-02	7.30
CS4-H1114-03	9.90
CS4-H1114-04	12.50
CS4-H1114-05	14.80
CS4-H1114-06	17.40
CS4-H1114-07	20.10
CS4-H1114-08	22.20
CS4-H1114-09	25.00
CS4-H1114-10	27.60
CS4-H1114-11	29.80
CS4-H1114-12	32.70

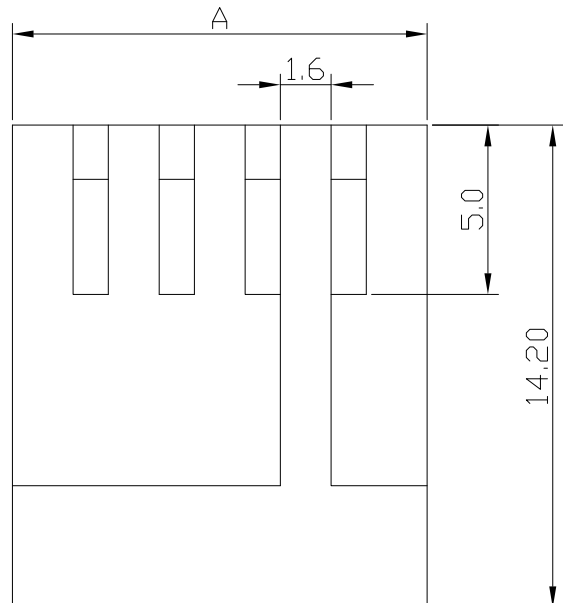

<b>DESCRIPTION(內容):</b> <b>2.5mm Wire-to-Board Housing (RoHS)</b>  <b>PART NO:</b> (料號) <b>CS4-H1114-XX</b>  <b>DWG NO(圖號):</b> 2442-H-XX	<b>DRAWN(製圖):</b> <b>GONG</b>	<b>GENERAL TOLERANCE:</b> (公差) .X ±0.5 .XX ±0.2	<b>REV:</b> <b>R2</b>	<b>REV</b>  <b>R0</b> <b>R1</b> <b>R2</b> <b>R3</b>	<b>DESCRIPTION</b>  RELEASE 2014料號P數編碼統一兩碼 更換確認章	<b>DATE</b>  <b>2012.08.01</b> <b>2014.12.19</b> <b>2019.09.02</b>
	<b>CHECKED(確認):</b>  <b>MANDY</b>		<b>UNIT:</b> <b>mm</b>			
	<b>APPROVAL(核准):</b>  <b>JOHNNY</b>	<b>SCALE(比例):</b> <b>FREE</b>		<b>SIZE:</b> <b>A4</b>		
				<b>SHEET:</b> <b>1/1</b>		