

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

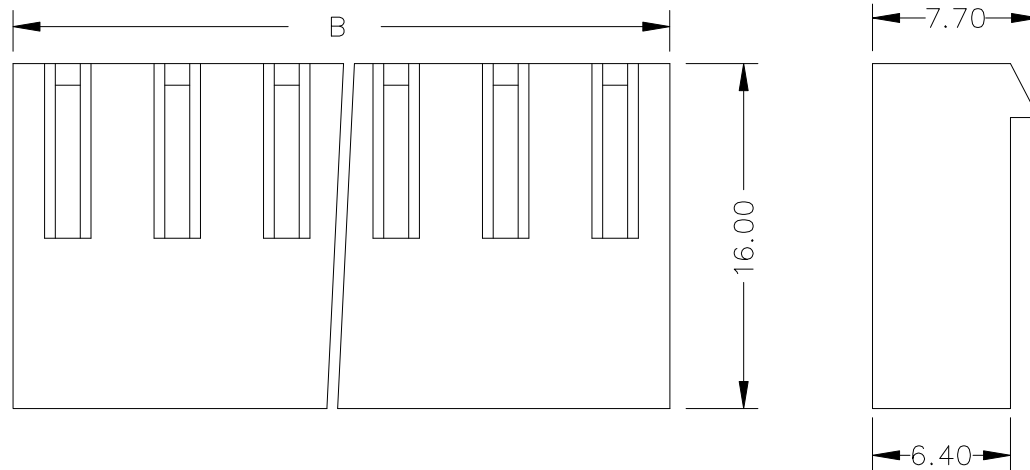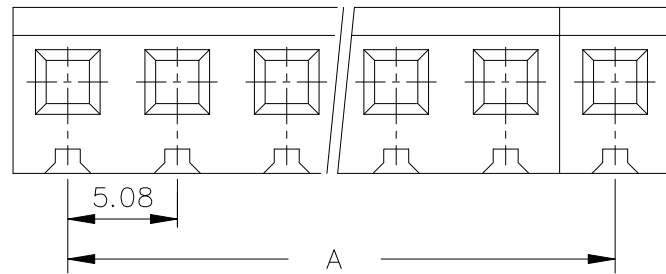

Poles	Dimension mm		Part No.	Note.
	A	B		
02	5.08	10.16	CW-H508-02	
03	10.16	15.24	CW-H508-03	
04	15.24	20.32	CW-H508-04	
05	20.32	25.40	CW-H508-05	
06	25.40	30.48	CW-H508-06	
07	30.48	35.56	CW-H508-07	
08	35.56	40.64	CW-H508-08	
09	40.64	45.72	CW-H508-09	
10	45.72	50.80	CW-H508-10	
11	50.80	55.88	CW-H508-11	
12	55.88	60.96	CW-H508-12	



承洧科技股份有限公司
Cherg Weei Technology Corp.

DESCRIPTION(內容):
5.08mm Wire-to-Board Housing
(RoHS)

PART NO:
(料號) CW-H508-XX
DWG NO(圖號): 5080-XX

DRAWN(製圖):
GONG
CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
X.XX ± 0.3
X.X ± 0.5

SCALE(比例):
FREE



REV:
R3
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV
R0
R1
R2
R3

DESCRIPTION

環保料
變更環保章字樣
2014年8月料號P數編碼統一兩碼

DATE

2006.03.20
2006.06.29
2006.08.15
2015.01.26