

A

B

C

D

E

## SPECIFICATIONS

Current rating : 3A AC, DC

Voltage rating : 250V AC, DC

Temperature range : -25°C to +85°C

Contact resistance : 10mΩ Max.



Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-0



Poles	Dimension mm (in.)		Part No.
	A	B	
02	2.50 (0.098)	5.70(0.224)	CX-H250-02
03	5.00 (0.197)	8.20(0.323)	CX-H250-03
04	7.50 (0.295)	10.70(0.421)	CX-H250-04
05	10.00 (0.394)	13.20 (0.520)	CX-H250-05
06	12.50 (0.492)	15.70(0.618)	CX-H250-06
07	15.00 (0.591)	18.20(0.717)	CX-H250-07
08	17.50 (0.689)	20.70(0.815)	CX-H250-08
09	20.00 (0.787)	23.20(0.913)	CX-H250-09
10	22.50 (0.886)	25.70(1.012)	CX-H250-10
11	25.00 (0.984)	28.20(1.110)	CX-H250-11
12	27.50 (1.802)	30.70(1.209)	CX-H250-12
13	30.00 (1.181)	33.20(1.307)	CX-H250-13
14	32.50 (1.280)	35.70(1.406)	CX-H250-14
15	35.00 (1.378)	38.20(1.504)	CX-H250-15
16	37.50 (1.476)	40.70(1.602)	CX-H250-16
17	40.00 (1.578)	43.20(1.701)	CX-H250-17
18	42.50 (1.680)	45.70(1.799)	CX-H250-18
20	47.50 (1.870)	50.70(1.996)	CX-H250-20

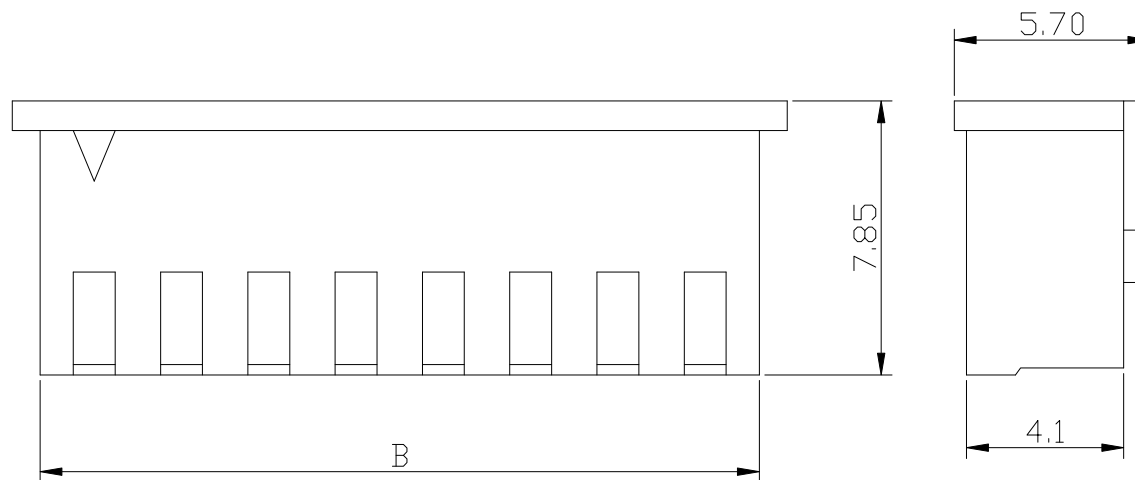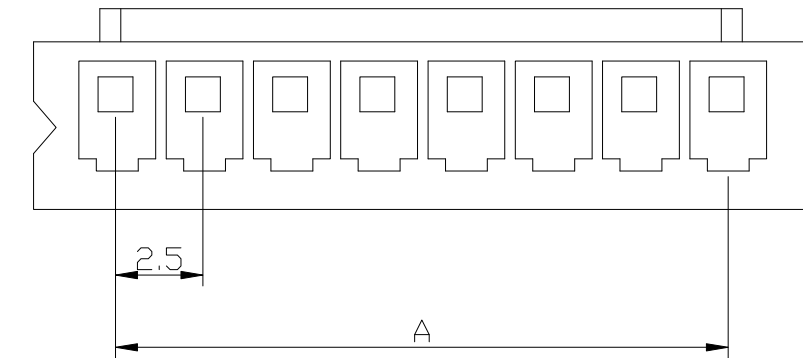

承洧科技股份有限公司  
Cherg Wee Technology Corp.

DESCRIPTION(內容)  
**2.5mm Wire-to-Board Housing (RoHS)**

PART NO:  
(料號) **CX-H250-XX**

DWG NO(圖號): **2500J-H**

DRAWN(製圖)  
**Gong**

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:  
(公差)

.X ±0.3  
.XX ±0.2

SCALE(比例):

**FREE**



REV:  
**R4**

UNIT:  
**mm**

SIZE:  
**A4**

SHEET:  
**1/1**

REV

**R0**  
**R1**

**R2**

**R3**  
**R4**

DESCRIPTION

環保料  
變更環保章字樣  
新增17.18P, 變更額定電流(原:2.5A)  
2014年料號編碼統一兩碼

DATE

2006.01.12  
2006.07.10  
2006.08.15  
2013.03.08  
2014.11.11

A

B

C

D

E