
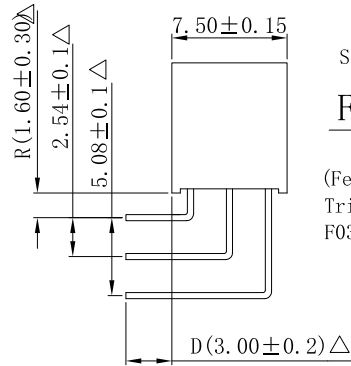
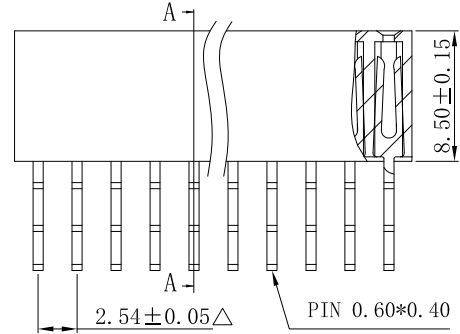


P. C. B Layout

SPECIFICATIONS

Current Rating :3Amp
 Insulator Resistance :5000 Megohms min.
 Contact Resistance :20 M ohms max.
 Dielectric Withstanding :AC 1000V
 Operating Temperature :-40° C ~ +105° C
 Contact Material :Brass
 Insulator Material :Polyester, UL 94V-0
 Standard :Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over



| Series | Connector Type | Contact Plating | Material | Pin Length mm | Number of Contacts |
|---|--------------------------|--|--|---------------|--------------------|
| F031 | X | X | X | DXXX | -XX |
| (Female Header Triple Row) F031 (2.54 H:8.5 W:7.5) | R:Right Angle R:1.6mm | G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G) | P:PBT C:LCP N:Nylon-6T M:Nylon-9T (Standard:N) | R-D D030 | (09T096 Contacts) |



DESCRIPTION(內容):
2.54mm Female Header H:8.5 W:7.5 90° (RoHS)
 PART NO:
 (料號) **F031-RG_-D030-XX**
 DWG NO(圖號):

DRAWN(製圖): 鄧文廣
 CHECKED(確認): 黃炳秋
 APPROVAL(核准): 鄧文廣
 GENERAL TOLERANCE:(公差)
 .X .XXXX
 .XX .X°
 .XXX .XX°
 SCALE(比例): 1:XX

| REV: A/1 | REV | DESCRIPTION | DATE |
|------------|-----|--------------|------------|
| UNIT: mm | 1 | △此符號表示重點管控尺寸 | 2019.11.13 |
| SIZE: A4 | 2 | | |
| SHEET: 1/1 | 3 | | |
| | 4 | | |