
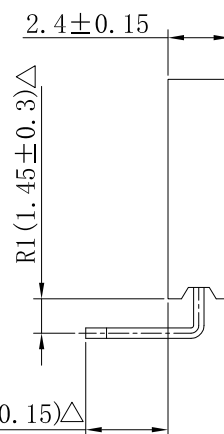


P. C. B. Hole Layout

### Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Nylon-6T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

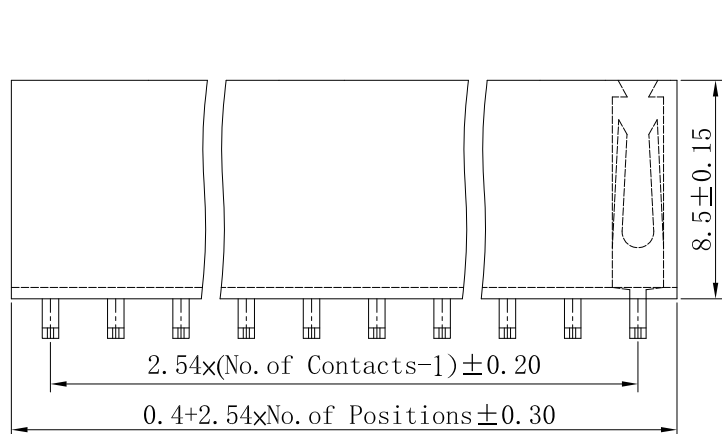

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts
F101	X	X	X	- DXXX	-XX
(Female Header Single Row)	R:Right Angle R1:1.45mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT C:LCP N:Nylon-6T NI:Nylon-9T (Standard:P)	R-D D032 (Standard:R-D032)	(02 TO 40 Contacts)
F101 (2.54 H:8.5 W:2.4)					



<b>DESCRIPTION(内容):</b> 2.54mm Female Header H:8.5 W:2.4 90° (RoHS)	<b>DRAWN(製圖):</b> 邓文广	<b>GENERAL TOLERANCE:(公差):</b> .X .XXXX .XX .X° .XXX .XX°	<b>REV: A/1</b> <b>UNIT: mm</b> <b>SIZE: A4</b> <b>SHEET: 1/1</b>	<b>REV</b> 1 2 3 4	<b>DESCRIPTION</b> △此符號表示重點管控尺寸	<b>DATE</b> 2019.11.13
	<b>CHECKED(確認):</b> 邓文广	<b>APPROVAL(核准):</b> Jimmy	<b>SCALE(比例):</b> 1:XX			
	<b>PART NO:(料號):</b> F101-R1G_-D032-XX					
	<b>DWG NO(圖號):</b>					