



A B C D E

1


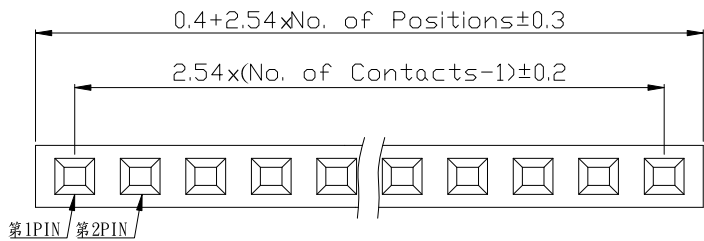


Specifications

Current Rating : 3 Amps
 Insulator Resistance : 5000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 1000 V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over



2

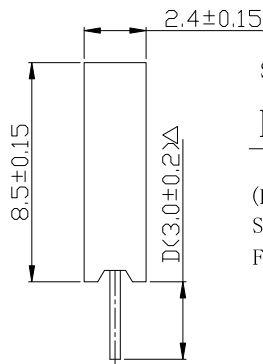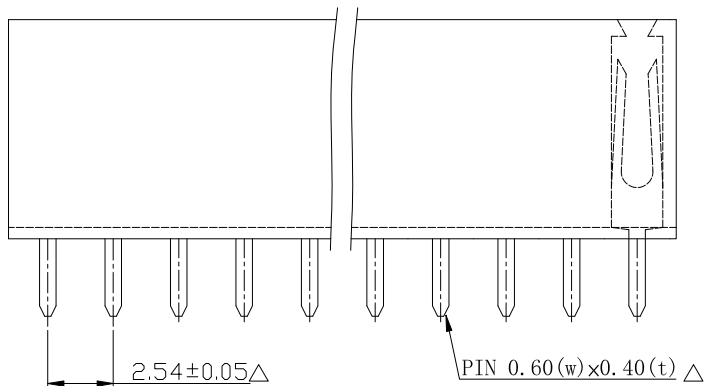

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F101	X	X	X	DXXX	-XX
(Female Header Single Row) F101 (2.54 H:8.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(02 TO 40 Contacts)

3



DESCRIPTION(內容): 2.54mm Female Header H:8.5 W:2.4 180° Nylon-6T (RoHS) PART NO: (料號) F101-SG_-D030-XX DWG NO(圖號):	DRAWN(製圖): 黃玉美	GENERAL TOLERANCE: (公差)	REV: A/5	REV	DESCRIPTION	DATE	
	CHECKED(確認): 黃炳秋	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	△ 此符號表示重點管控尺寸	2005.08.13	
	APPROVAL(核准): 鄧文廣	SCALE(比例): 1:XX	⊕	SIZE: A4	1	舊料號: CCPBA850S01×XX	2005.12.04
				SHEET: 1/1	3	舊料號: F101-XXSGN-D030	2006.06.01
				4	塑膠總長加膠有變動 PIN0.64(w)x0.4(t)改為PIN0.60(w)x0.4(t)	2007.02.26 2007.10.05	

A B C D E FILE NO: CWJ-4E-09