


P.C.B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

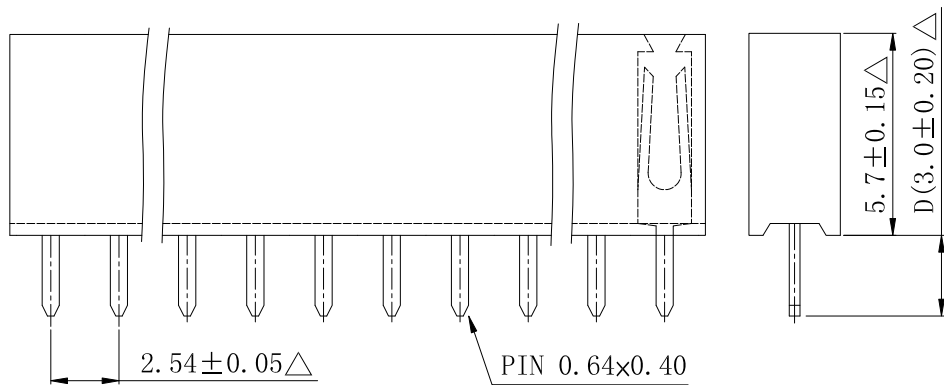

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F103	X	X	X	DXXX	-XX
(Female Header Single Row) F103 (2.54 H:5.7)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:P)	S-D D030 (Standard:S-D030)	(02 TO 40 Contacts)

△ 此符號表示重點管控尺寸



DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE:(公差)	REV: R1	REV	DESCRIPTION	DATE
2.54mm Female Header 180° H:5.7 W:2.4 (RoHS)	GONG	.X .XXX .XX .X ° .XXX .XX °	UNIT:	R0	舊料號: CCPBA570S01×XX 舊料號: F103-XXSGP-D30	2005.08.13
	CHECKED(確認):		mm	R1		2005.12.04
PART NO: (料號) F103-SG_-D030-XX	TERESA	SCALE(比例):	SIZE: A4	R2	更新料號	2006.09.13
DWG NO(圖號):	APPROVAL(核准):	1:XX	SHEET: 1/1	R3		
	JOHNNY					