



A Type

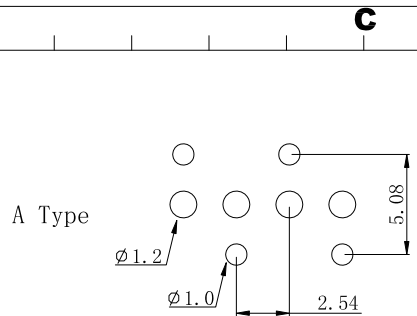


A Type

### Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

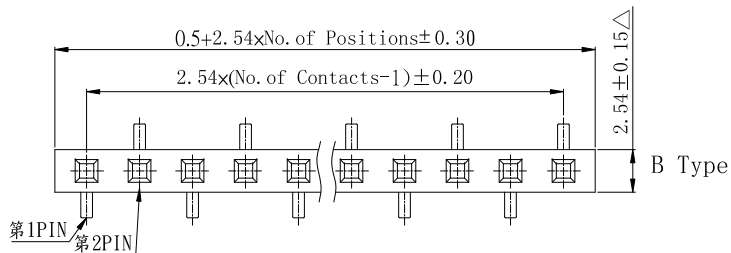


B Type

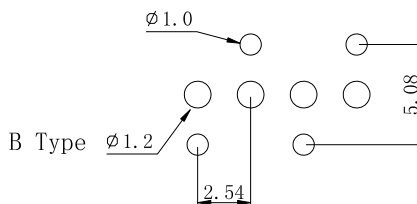

B Type

P. C. B. Layout

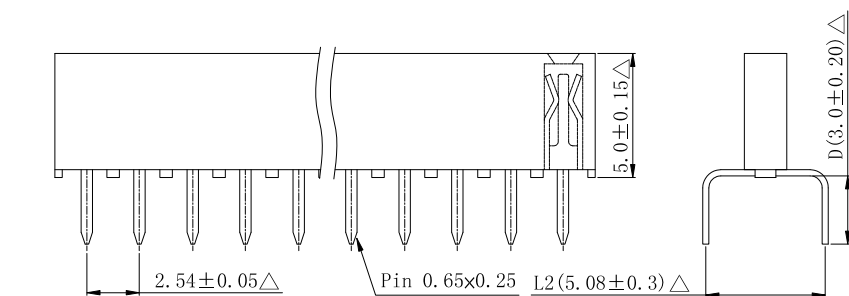

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
<b>F194</b>	- <b>X</b>	<b>X</b>	<b>X</b>	- <b>DXXX</b>	- <b>XX</b>	- <b>XT</b>
(Female Header Single Row) F194 (2.54 H:5.0 With stand off)	L: 蜈蚣腳 L2: 5.08MM	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T C: LCP (Standard:P)	R-D D030 (Standard:R-D028)	(02 TO 40 Contacts)	AT:A TYPE BT:B TYPE



DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE:(公差)	REV: R3	REV	DESCRIPTION	DATE
<b>2.54mm Female Header H:5.0 W:2.54</b> 蜈蚣腳排母(RoHS)	GONG	.X .XXXX .XX .X° .XXX .XX°	UNIT:	R0	舊料號: CCPBA500R01:XXS 舊料號: F194-XXL2GP-D030-AT	2006.04.12
	CHECKED(確認): TERESA		mm	R1	更新料號	2006.07.31
PART NO: (料號) F194-L2G_-D030-XX-XT	APPROVAL(核准):	SCALE(比例):	A4	R2	變更環保章字樣	2006.08.15
DWG NO(圖號):	JOHNNY	1:XX	SHEET: 1/1	R3	圖面更新	2018.03.22