


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

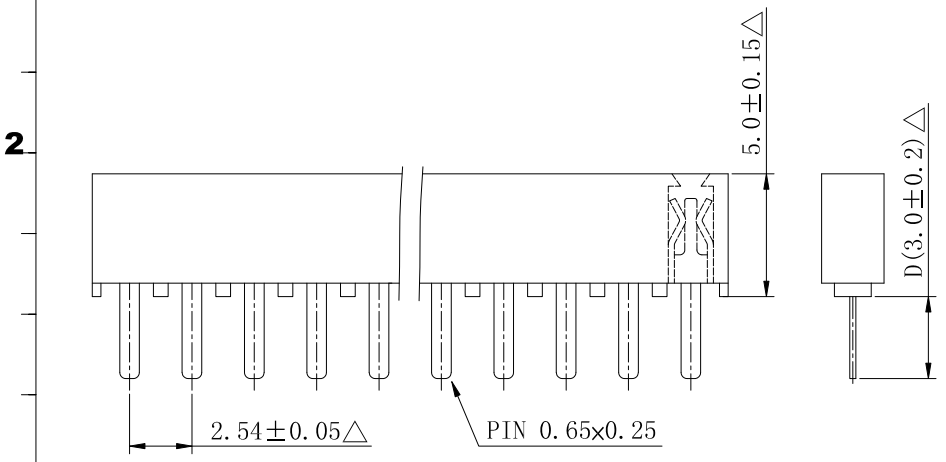

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F194	- X	X	X	- DXXX	- XX
(Female Header Single Row) F194(2.54 H:5.0 With stand off)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:P)	S-D D030 (Standard:S-D030)	(02 TO 40 Contacts)

△ 此符號表示重點管控尺寸



DESCRIPTION(內容) 2.54mm Female Header H:5.0 W:2.5 180° (RoHS) PART NO: (料號) F194-SG _D030-XX DWG NO(圖號):	DRAWN(製圖) GONG	GENERAL TOLERANCE: (公差)	REV: R2	REV	DESCRIPTION	DATE	
	CHECKED(確認): TERESA	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號:CCPBA500S01×XX 舊料號:F194-XXSGP-D30	2005.08.13 2005.12.04
	APPROVAL(核准): JOHNNY	SCALE(比例): 1:XX		SIZE: A4	R1	更新料號	2006.07.12
				SHEET: 1/1	R2	變更環保章字樣	2006.08.15
				R3			