

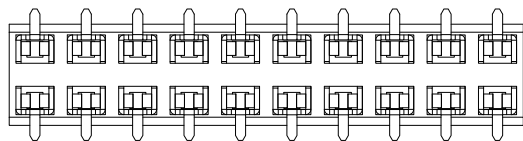
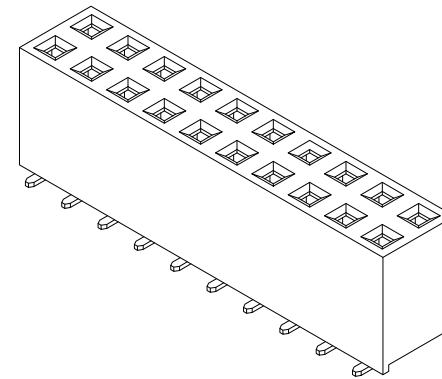


Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T/Nylon-9T/LCP
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F202	X	X	X	DXXX	-XX
(Female Header Dual Row) F202 (2.54 H: 7.1)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T NI: Nylon-9T C: LCP (Standard: N)	M-D D066	(04 TO 80 Contacts)

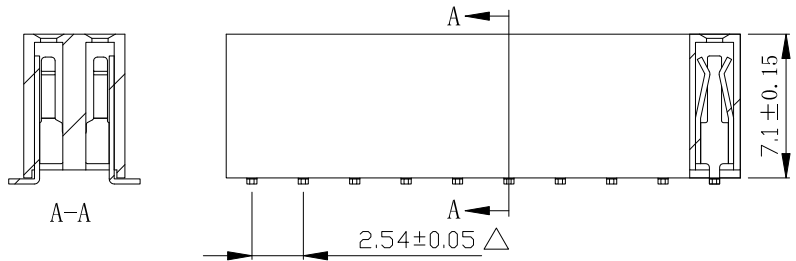

DESCRIPTION(内容): 2.54mm Female Header H:7.1 W:5.00 SMT (RoHS)	DRAWN(製圖): 鄧文廣	GENERAL TOLERANCE:(公差) .X .XXXX .XX .X° .XXX .XX°	REV: A/1 UNIT: mm SIZE: A4 SHEET: 1/1	REV 2 3 4 6	DESCRIPTION △ 此符號表示重點管控尺寸	DATE 2017.09.19	
	CHECKED(確認): 黃炳秋	APPROVAL(核准): 鄧文廣	SCALE(比例): 1:XX				
	PART NO:(料號) F202-MG_-D066-XX						
	DWG NO(圖號):						