
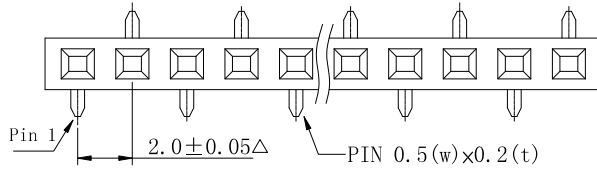



A TYPE

A TYPE

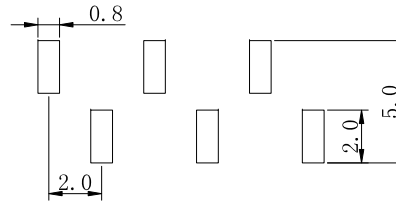

B TYPE


B TYPE

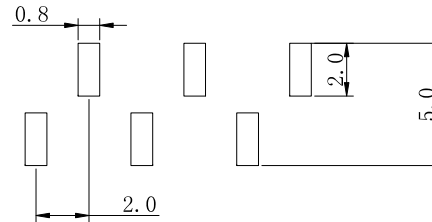

P. C. B. Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/Nylon-9T/LCP
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

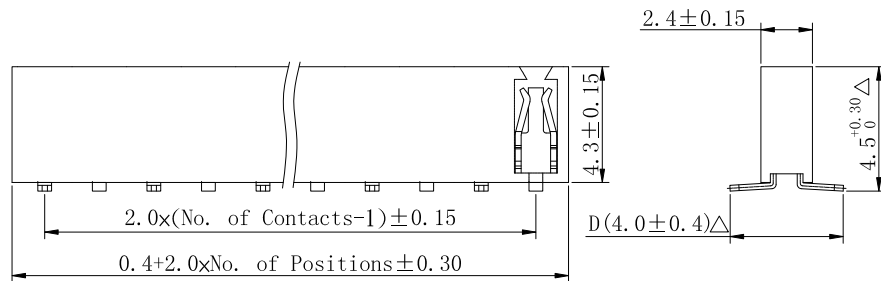

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F301	X	X	X	DXXX	-XX	-XT
(Female Header Single Row) F301 (2.00 H:4.3 W:2.4)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T NI: Nylon-9T C: LCP (Standard:N)	M-D D040	(02 TO 40 Contacts)	AT: TYPE A BT: TYPE B



DESCRIPTION(內容):
2.0mm Female Header H:4.3 W:2.4 SMT (RoHS)

PART NO:
(料號) **F301-MG_-D040-XX-XT**

DWG NO(圖號):

DRAWN(製圖): 鄧文廣

CHECKED(確認): 黃炳秋

APPROVAL(核准): 鄧文廣

GENERAL TOLERANCE(公差):
.X .XXX
.XX .X°
.XXX .XX°

SCALE(比例): 1:XX

REV	DESCRIPTION	DATE
A/5		
1	△此符號表示重點管控尺寸	2018.07.03
2		
3		
4		