


Specifications

Current Rating	: 2 Amp
Insulator Resistance	: 3000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze.
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T/PBT/LCP
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over
Note:	
	Duplex plating: Gold Plated on contact area, Tin on solder area



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F301	X	X	X	DXXX	-XX
(Female Header Single Row) F301 (2.00 H: 4.3)	R: Right Angle	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T C: LCP (Standard: P)	R-D D024 (Standard: R-D024)	(02 TO 40 Contacts)

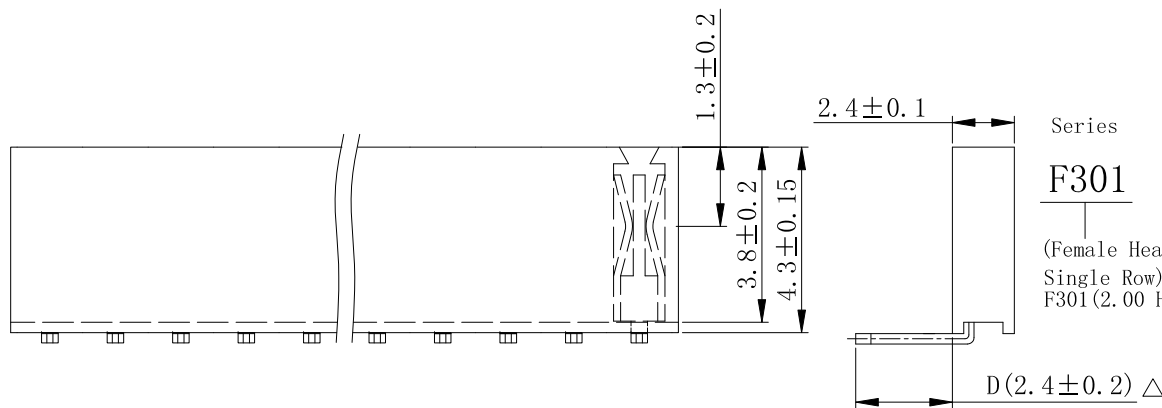

DESCRIPTION(內容): 2.0mm Female Header H:4.3 W:2.4 90° (RoHS)	DRAWN(製圖): 邓文广	GENERAL TOLERANCE:(公差): .X .XXXX .XX .X ° .XXX .XX °	REV: A/1 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸	DATE 2016.10.07	
	CHECKED(確認): 邓文广	APPROVAL(核准): Jimmy	SCALE(比例): 1:XX				
	PART NO:(料號): F301-RG_-D024-XX						
	DWG NO(圖號):						