



# Specifications

Current Rating	: 2 Amp
Insulator Resistance	: 3000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Phosphor Bronze.
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T/LCP
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over
Note:	
	Duplex plating: Gold Plated on contact area, Tin on solder area



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F401	X	X	X	DXXX	-XX
(Female Header Single Row) F401 (2.00 H: 4.3)	M: SMT Type	G: Gold Flash T: Tin Plated	N: Nylon-6T C: LCP (Standard: N)	M-D D060 (Standard: M-D060)	(04 TO 80 Contacts)
		A: 10U"Gold B: 15U"Gold C: 20U"Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)			

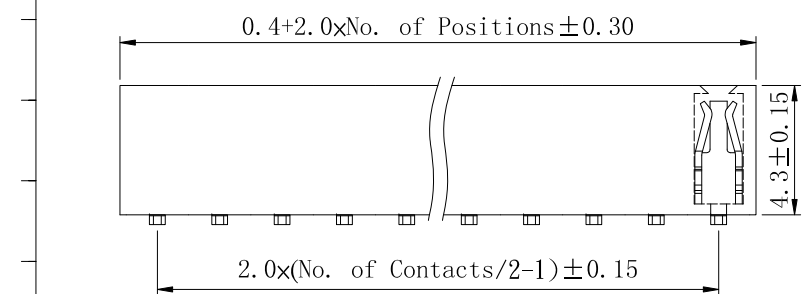

<b>DESCRIPTION(內容):</b> 2.0mm Female Header H:4.3 W:4.2 SMT (RoHS)	<b>DRAWN(製圖):</b> 鄧文廣	<b>GENERAL TOLERANCE:(公差)</b> .X .XXXX .XX .X° .XXX .XX°	<b>REV: A/1</b> <b>UNIT: mm</b> <b>SIZE: A4</b> <b>SHEET: 1/1</b>	<b>REV</b> 1 2 3 4	<b>DESCRIPTION</b> △此符號表示重點管控尺寸	<b>DATE</b> 2016.06.28
	<b>CHECKED(確認):</b> 黃炳秋	<b>APPROVAL(核准):</b> 鄧文廣	<b>SCALE(比例):</b> 1:XX			
	<b>PART NO:(料號)</b> F401-MG_-D060-XX					
	<b>DWG NO(圖號):</b>					