


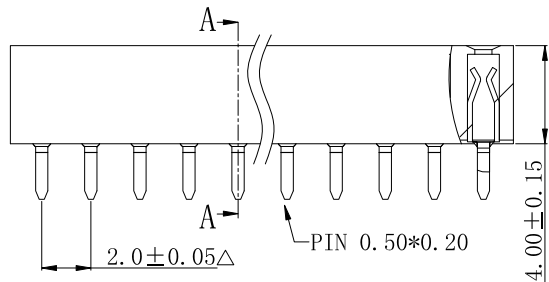


Specifications

Current Rating : 2 Amp
 Insulator Resistance : 3000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze.
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T/Nylon-9T/PBT/LCP
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex plating: Gold Plated on contact area,
 Tin on solder area



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F402	-	X	X	- DXXX	-XX
(Female Header Dual Row)	S: Straight Type	G: Gold Flash T: Tin Plated	P: PBT N: Nylon-6T N1: Nylon-9T C: LCP (Standard: P)	S-D D024 (Standard: S-D024)	(04 TO 80 Contacts)
F402 (2.00 H: 4.0 W: 4.0)		A: 10U"Gold B: 15U"Gold C: 20U"Gold E: 1.5U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)			



DESCRIPTION(內容):
2.0mm Female Header 180° H:4.0 W:4.0
 (RoHS)

PART NO:
 (料號) **F402-SG_-D024-XX**

DWG NO(圖號):

DRAWN(製圖):
 劉建平


CHECKED(確認):
 黃炳秋

APPROVAL(核准):
 鄧文廣

GENERAL TOLERANCE:
 (公差)

.X .XXXX
 .XX .X°
 .XXX .XX°

SCALE(比例):
 1:XX



REV:
A/2

UNIT:
 mm

SIZE:
A4

SHEET:
 1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

塑膠總長加膠有變動

DATE

2007.01.25

2007.03.02