


P. C. B. Hole Layout

Specifications

Current Rating : 2 Amp
 Insulator Resistance : 3000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40 °C ~ +105 °C
 Soldering Temperature : 260 °C for 3~5s Max.
 Contact Material : Phosphor Bronze.
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex plating: Gold Plated on contact area,
 Tin on solder area

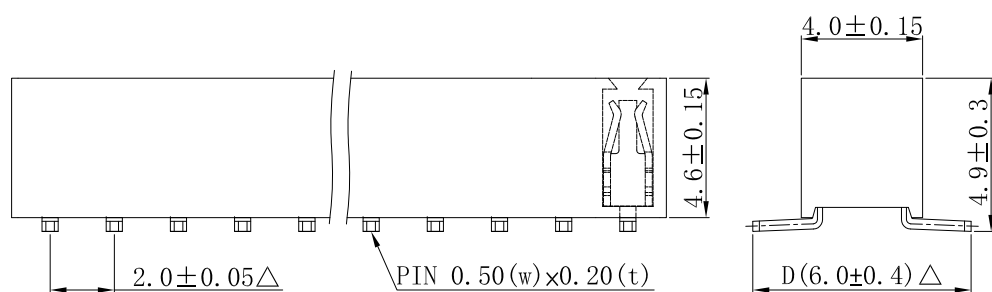

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F403	X	X	X	DXXX	-XX
(Female Header Dual Row) F403 (2.00 H:4.6)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	C: LCP N: Nylon-6T N1: Nylon-9T (Standard: N)	M-D D060 (Standard: M-D060)	(04 TO 80 Contacts)



DESCRIPTION(内容):
2.00mm Female Header H:4.6 W:4.0 SMT (RoHS)
 PART NO:
 (料 號) **F403-MG_-D060-XX**
 DWG NO(圖號):

DRAWN(製圖): 邓文广
 CHECKED(確認): 邓文广
 APPROVAL(核准): Jimmy
 GENERAL TOLERANCE:(公差)
 .X .XXXX
 .XX .X °
 .XXX .XX °
 SCALE(比例): 1:XX

REV: A/1	REV	DESCRIPTION	DATE
UNIT: mm	1	△此符號表示重點管控尺寸	2019.11.13
SIZE: A4	2		
SHEET: 1/1	3		
	4		