
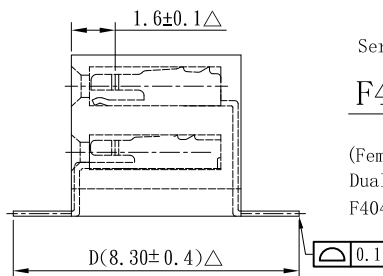


P. C. B. Layout

Specifications

Current Rating : 2 Amp
 Insulator Resistance : 3000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze.
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex plating: Gold Plated on contact area,
 Tin on solder area

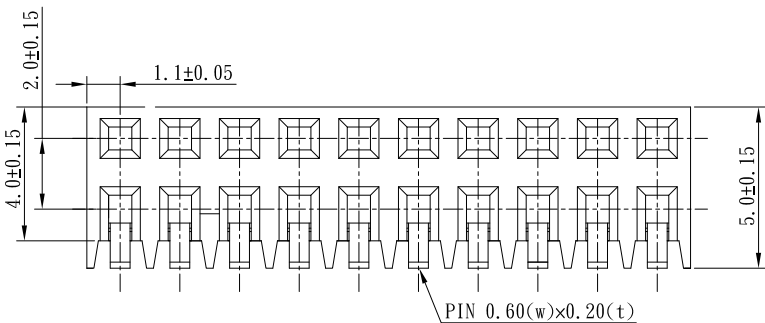

Series	Connector Type	Contact Plating	Material	Pin Length	mm	Number of Contacts
F404	X	X	X	DXXX		-XX
(Female Header Dual Row) F404 (2.00 H:5.0)	M:SMT Type	G:Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	C:LCP N:Nylon-6T NI:Nylon-9T (Standard:N)	M-D D083		(04 TO 80 Contacts)



DESCRIPTION(內容): 2.0mm Female Header H:5.0 W:5.0 側插SMT型 (RoHS)	DRAWN(製圖): 邓文广	GENERAL TOLERANCE:(公差) .X .XXXX .XX .X° .XXX .XX°	REV: A/1 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸	DATE 2019.11.13	
	CHECKED(確認): 邓文广	APPROVAL(核准): Jimmy	SCALE(比例): 1:XX				
	PART NO:(料號) F404-MG_-D083-XX						
	DWG NO(圖號):						