




P.C.B Hole Layout

Specifications

Current Rating	: 2 Amp
Insulator Resistance	: 3000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

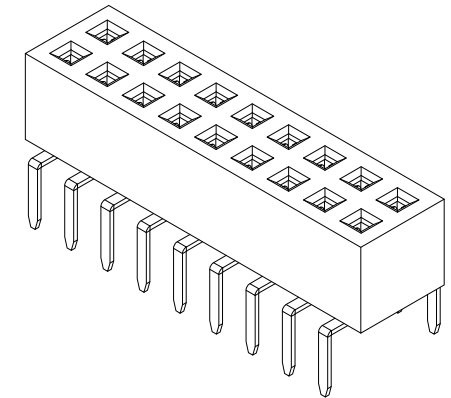

SECTION A-A

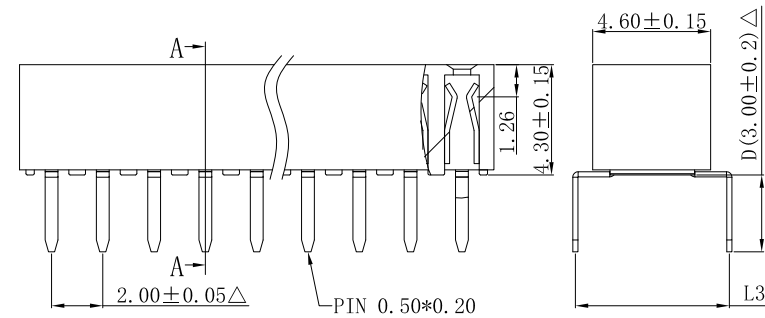

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts
F490	X	X	X	DXXX	-XX
(Female Header Dual Row F490 (2.00 H:4.3 W:4.6 With stand off)	L: 蜈蚣腳 L3: 6.00MM	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold E: 1.5U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T NI: Nylon-9T (Standard: N)	L-D D030 (Standard: L-D030)	(04 TO 80 Contacts)



DESCRIPTION(內容):
2.0mm Female Header H:4.3 W:4.6 蜈蚣腳排母 (RoHS)

PART NO:
(料號) F490-L3G_-D030-XX

DWG NO(圖號):

DRAWN(製圖): 鄧文廣

CHECKED(確認): 王建平

APPROVAL(核准): 鄧文廣

GENERAL TOLERANCE:
(公差)

.X	.XXXX
.XX	.X°
.XXX	.XX°

SCALE(比例): 1:XX

REV:	REV	DESCRIPTION	DATE
A/1	1	△此符號表示重點管控尺寸	2019.11.13
UNIT: mm	2		
SIZE: A4	3		
SHEET: 1/1	4		