
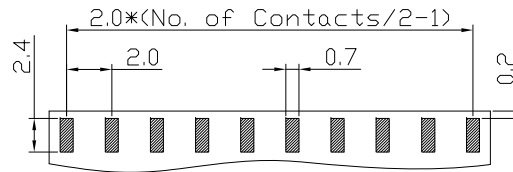


A B C D E

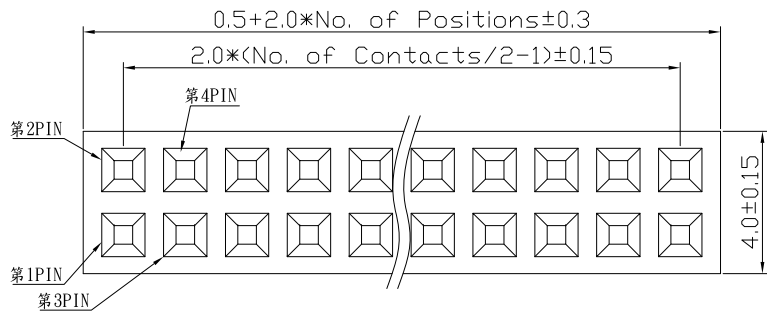



P.C.B. Layout
(BOTH SIDES)

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:PA-46/Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	



2 2

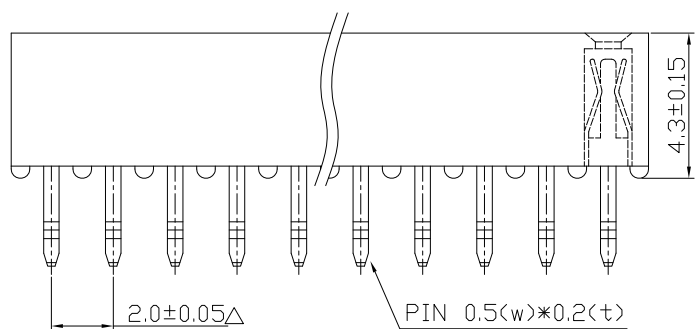

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F491	X	X	X	DXXX	-XX
(Female Header Dual Row) F491 (2.00 H:4.3 W:4.0 With stand off)	K:"K" Type K:0.9 mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	A:PA46 N:Nylon-6T (Standard:N)	K-D D024 (Standard:K-D024)	(04 TO 80 Contacts)

3 3



DESCRIPTION(內容): 2.0mm Female Header 夾板式 H:4.3 W:4.0 Nylon-6T (RoHS)	DRAWN(製圖): 彭維民	GENERAL TOLERANCE:(公差): .X .XXXX .XX .X° .XXX .XX°	REV: A/2 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸 舊料號: F491-XXKGN-D024	DATE 2006.07.06 2006.07.06
	CHECKED(確認): 鄧文廣	SCALE(比例): 1:XX				
	PART NO:(料號): F491-KG_-D024-XX	APPROVAL(核准): 鄧文廣				
	DWG NO(圖號):					

A B C D E FILE NO: CWJ-4E-09