





A**B****C****D****E**

Specifications

| | |
|-------------------------|-----------------------|
| Current Rating | : 1 Amp |
| Insulator Resistance | : 1000 Megohms Min. |
| Contact Resistance | : 20 m ohms max. |
| Dielectric Withstanding | : AC 500 V |
| Operating Temperature | : -40°C ~ +105°C |
| Contact Material | : Brass |
| Insulator Material | : Polyester, UL 94V-0 |
| Standard | : Nylon-6T/LCP |
| Finish | : Gold Plated |
| Standard | : Gold Flash all over |

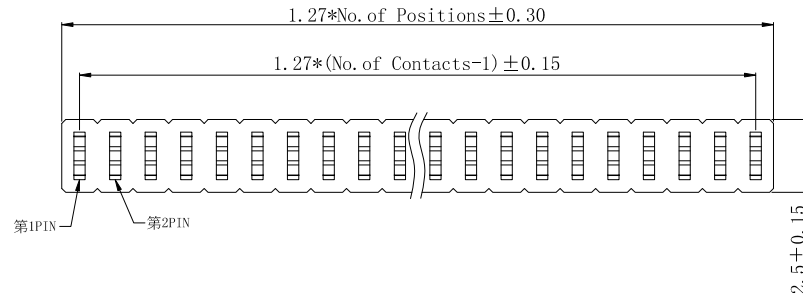

P. C. B Layout

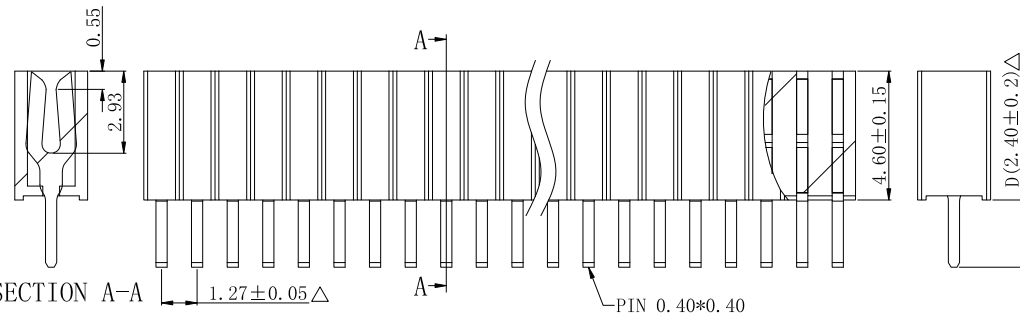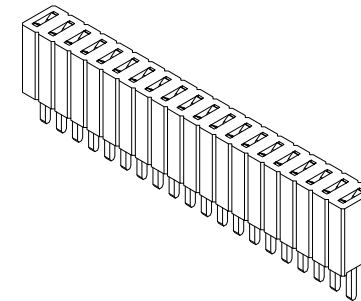

| Series | Connector Type | Contact Plating | Material | Pin Length mm | Number of Contacts |
|---|------------------|---|---------------------------------------|----------------------------------|---------------------|
| F501 | X | X | X | - DXXX | -XX |
| (Female Header Single Row) F501 (1.27 H:4.6) | S: Straight Type | G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G) | N: Nylon-6T C: LCP (Standard:N) | S-D D024 (Standard:S-D024) | (02 TO 30 Contacts) |



CHERNG WEEI

DESCRIPTION(內容):
1.27mm Female Header 180° H:4.6 W:2.5
波浪型(RoHS)

PART NO:
(料號) **F501-SG_-D024-XX**

DWG NO(圖號):

DRAWN(製圖):
邓文广

CHECKED(確認):
邓文广

APPROVAL(核准):
Jimmy

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX



REV:
A/2

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1**2****3****6**

DESCRIPTION

△此符號表示重點管控尺寸

更改產品最大PIN數

DATE

2016.07.12**2017.03.08****A****B****C****D****E**