

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F504	X	X	X	DXXX	-XX
(Female Header Single series) F504 (1.27 H:3.4)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	S-D D024 (Standard: S-D024)	(02 TO 40 Contacts)



DESCRIPTION(內容): 1.27mm Female Header 180° H:3.4 W:2.2 Nylon-6T(RoHS)	DRAWN(製圖): 黄炳秋	GENERAL TOLERANCE:(公差) .X .XXX .XX .X° .XXX .XX°	REV: A/4 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1	DESCRIPTION △此符號表示重點管控尺寸	DATE 2005.08.13
	CHECKED(確認): 黄炳秋	APPROVAL(核准): 邓文广	SCALE(比例): 1:XX	2	舊料號: CCPBC340S01×XX	2005.12.04
	PART NO:(料號) F504-SGN-D024-XX			3	舊料號: F504-XXSGN-D024	2006.06.08
	DWG NO(圖號):			4	修改端子脚宽度0.40	2014.10.27



A

B

C

D

E

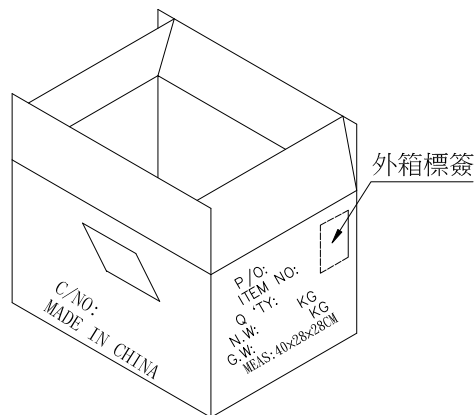

- 1.真空盤規格:(135X95X50mm) 17.5g
- 2.紙箱規格:外箱規格:(40X28X28cm)
- 3.注未夠一整箱,請酌量選箱進行包裝

Part No:	
Description:	
Quantity:	
Date:	


承洩料號
品名規格
數量
日期

(28盘產品裝1箱)





內標籤

內標籤



(PE:150mm*150mm)



(V017+PE)

PIN數	包材名稱	每管數量	單重/g	PIN數	包材名稱	每管數量	單重/g
				1X21	V008	392/PCS	0.40173
1X2	V017+PE袋	2000/PCS	0.03826	1X22	V008	392/PCS	0.42086
1X3	V017+PE袋	2000/PCS	0.05739	1X23	V008	336/PCS	0.43999
1X4	V017+PE袋	1000/PCS	0.07652	1X24	V008	336/PCS	0.45912
1X5	V017+PE袋	1000/PCS	0.09565	1X25	V008	336/PCS	0.47825
1X6	V017+PE袋	1000/PCS	0.11478	1X26	V008	280/PCS	0.49738
1X7	V017+PE袋	1000/PCS	0.13391	1X27	V008	280/PCS	0.51651
1X8	V017+PE袋	1000/PCS	0.15304	1X28	V008	280/PCS	0.53564
1X9	V017+PE袋	1000/PCS	0.17217	1X29	V008	280/PCS	0.55477
1X10	V008	840/PCS	0.19130	1X30	V008	280/PCS	0.57390
1X11	V008	728/PCS	0.21043	1X31	V008	280/PCS	0.59303
1X12	V008	672/PCS	0.22956	1X32	V008	224/PCS	0.61216
1X13	V008	616/PCS	0.24869	1X33	V008	224/PCS	0.63129
1X14	V008	616/PCS	0.26782	1X34	V008	224/PCS	0.65042
1X15	V008	560/PCS	0.28695	1X35	V008	224/PCS	0.66955
1X16	V008	504/PCS	0.30609	1X36	V008	224/PCS	0.68868
1X17	V008	504/PCS	0.32521	1X37	V008	224/PCS	0.70781
1X18	V008	448/PCS	0.34434	1X38	V008	224/PCS	0.72694
1X19	V008	448/PCS	0.36347	1X39	V008	189/PCS	0.74607
1X20	V008	392/PCS	0.38260	1X40	V008	189/PCS	0.76520



DESCRIPTION(內容)
1.27mm Female Header 180° H:3.4 W:2.2
Nylon-6T(RoHS)

PART NO:
(料號) F504-SGN-D024-XX(包裝圖)

DWG NO(圖號):

DRAWN(製圖)
王建平

CHECKED(確認):
邓文广

APPROVAL(核准):
邓文广

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX

REV:
A/2

UNIT:

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

V001变更为V017

DATE

2008.06.20

2013.01.21

A

B

C

D

E