



A

B

C



D

E

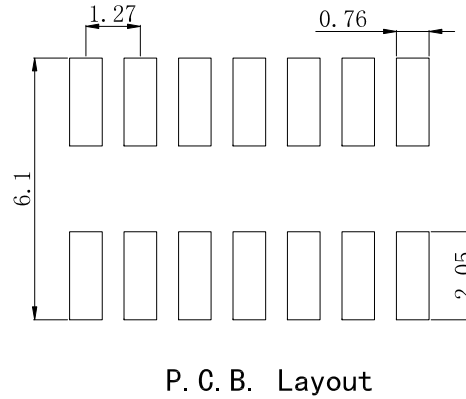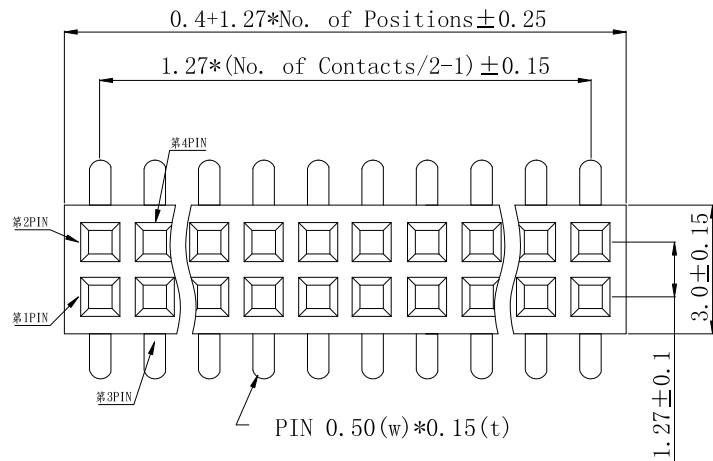

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester,UL 94V-0
Standard	:Nylon-6T/LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

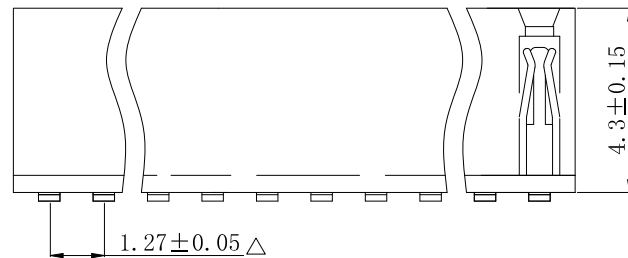

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F603	-	X	X	- DXXX	-XX
(Female Header Dual Row) F603 (1.27 H:4.3)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	M-D D051	(04 TO 80 Contacts)



DESCRIPTION(内容):

1.27mm Female Header H:4.3 W:3.0 SMT (RoHS)

PART NO:
(料 號)

F603-MG_-D051-XX

DWG NO(圖號):

DRAWN(製圖):

邓文广

CHECKED(確認):

邓文广

APPROVAL(核准):

Jimmy

GENERAL TOLERANCE:
(公差)

.X	.XXXX
.XX	.X °
.XXX	.XX °

SCALE(比例):

XX:XX

REV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

 Δ 此符號表示重點管控尺寸

DATE

2016.08.08

A

B

C

D

E

FILE NO: CWJ-4E-09