
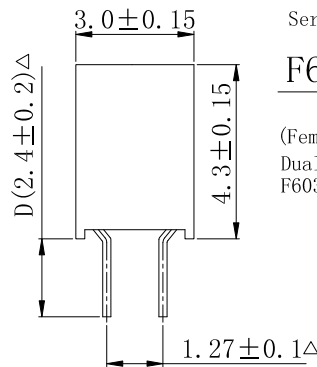


P. C. B Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

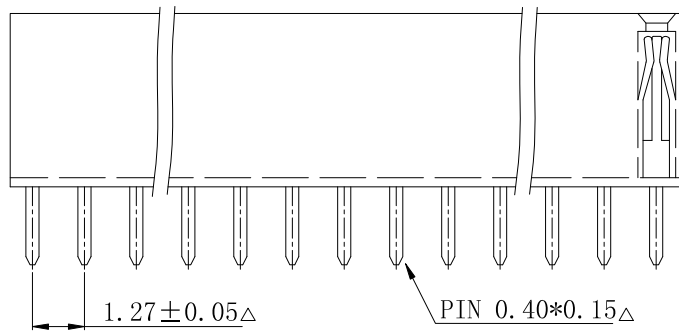

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F603	X	X	X	DXXX	-XX
(Female Header Dual Row) F603 (1.27 H:4.3)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	S-D D024 (Standard: S-D024)	(04 TO 80 Contacts)

	DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
	1.27mm Female Header H:4.3 W:3.0 180° (RoHS)	黃炳秋	(公差)	A/4			
	PART NO: (料號) F603-SG_-D024-XX	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT:	1	△此符號表示重點管控尺寸	2005.08.13
	DWG NO(圖號):	黃炳秋	APPROVAL(核准):	mm	2	舊料號: CCPBC430S02×XX-2.4	2005.12.04
		鄧文廣	SCALE(比例):	A4	3	舊料號: F603-XXSGN-D24	2006.06.08
		1:XX		SHEET:	4	端子腳寬度變更為0.40	2014.09.18
				1/1			