


Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Phosphor Bronze
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard	: Nylon-6T/LCP
Finish	: Gold Plated
Standard	: Gold Flash all over



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F703	X	X	X	DXXX	-XX
(Female Header Dual Row) F703 (1.00 H:2.0 W:1.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T C: LCP (Standard:N)	S-D D011	(02 TO 20 Contacts)

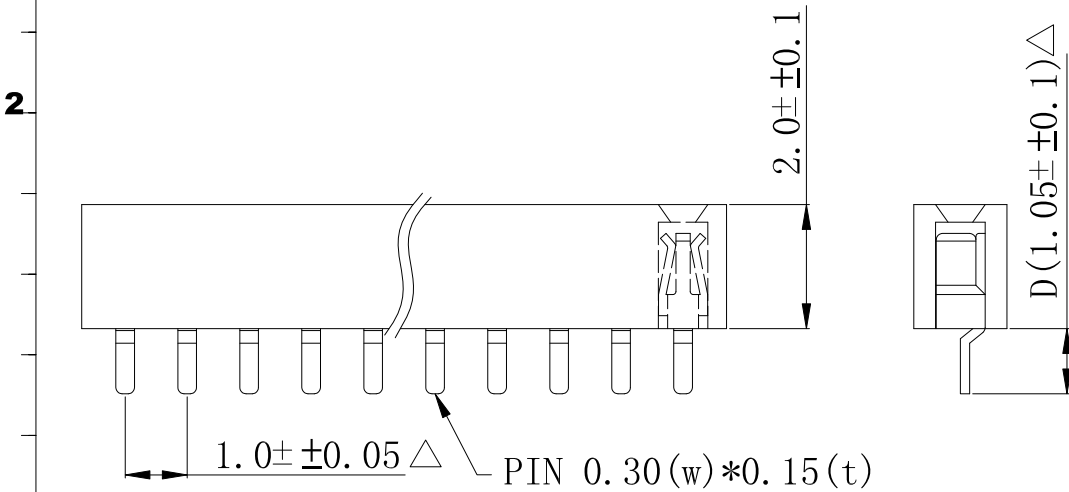

DESCRIPTION(內容): 1.0mm Female Header 180° H:2.0 W:1.5 (RoHS)	DRAWN(製圖): 鄧文廣	GENERAL TOLERANCE:(公差): .X .XXX .XX .X° .XXX .XX°	REV: A/1 UNIT: mm SIZE: A4 SHEET: X/X	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸	DATE 2016.07.11
	CHECKED(確認): 鄧文廣	APPROVAL(核准): Jimmy	SCALE(比例): 1:1			
	PART NO:(料號): F703-SG_-D011-XX					
	DWG NO(圖號):					