

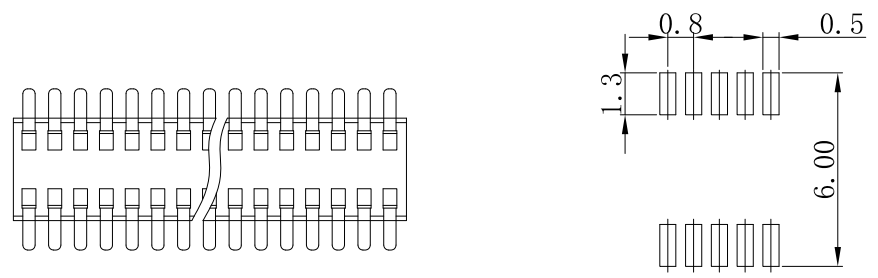


Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:800 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40° C ~ +105°C
Soldering Temperature	:260° C for 3-5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Gold Plated
	:Gold Flash all over

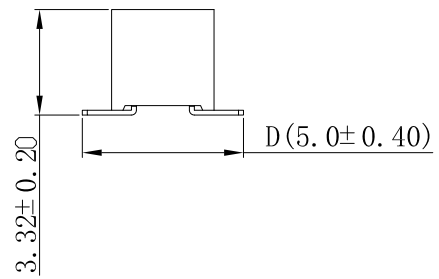

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F901	X	X	X	DXXX	-XX
(Female Header Dual Row) F901(0.8 H:3.12 W:3.18)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	C:LCP N:Nylon-6T NI:Nylon-9T (Standard:N)	M-D D050	(04 TO 80 Contacts)

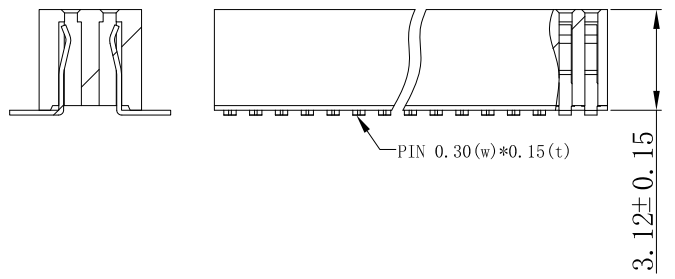

DESCRIPTION(内容):
0.8mm Female Header H:3.12 SMT (RoHS)

PART NO:
(料 號) F901-MG_-D050-XX

DWG NO(圖號):

DRAWN(製圖):
邓文广

CHECKED(確認):
邓文广

APPROVAL(核准):
Jimmy

GENERAL TOLERANCE:
(公差)

.X	.XXXX
.XX	.X°
.XXX	.XX°

SCALE(比例):
XX:XX

REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
X/X

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	2019.11.13
2		
3		
4		