


N= 正针线路板  
P/N: FPC228N0 XX -N1TT

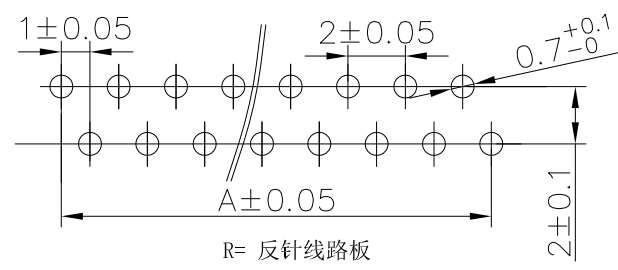

R= 反针线路板  
P/N: FPC228N1 XX -N1TT

**SPECIFICATION:**

- Poles: 4~30
- Voltage rating:  
AC, DC, 200V(50HZ)  
AC, DC, 50V(200HZ)
- Current rating:  
0.4A, AC/DC
- Withstand voltage:  
200V AC/minutes
- Working Temperature:  
-25°C ~ +85°C
- Insulation resistance: >500MΩ
- Contact resistance: <0.02Ω
- Terminal material:  
Phosphor Bronze/Tin-Plated
- Housing material:  
PA9T UL94V-0, Color: Black
- Packing: Tube

| NO. of Contacts (n) | Dimensions |       |      |
|---------------------|------------|-------|------|
|                     | A          | B     | C    |
| 04                  | 3.0        | 5.10  | 7.0  |
| 05                  | 4.0        | 6.10  | 8.0  |
| 06                  | 5.0        | 7.10  | 9.0  |
| 07                  | 6.0        | 8.10  | 10.0 |
| 08                  | 7.0        | 9.10  | 11.0 |
| 09                  | 8.0        | 10.10 | 12.0 |
| 10                  | 9.0        | 11.10 | 13.0 |
| 11                  | 10.0       | 12.10 | 14.0 |
| 12                  | 11.0       | 13.10 | 15.0 |
| 13                  | 12.0       | 14.10 | 16.0 |
| 14                  | 13.0       | 15.10 | 17.0 |
| 15                  | 14.0       | 16.10 | 18.0 |
| 16                  | 15.0       | 17.10 | 19.0 |
| 17                  | 16.0       | 18.10 | 20.0 |
| 18                  | 17.0       | 19.10 | 21.0 |
| 19                  | 18.0       | 20.10 | 22.0 |
| 20                  | 19.0       | 21.10 | 23.0 |
| 21                  | 20.0       | 22.10 | 24.0 |
| 22                  | 21.0       | 23.10 | 25.0 |
| 23                  | 22.0       | 24.10 | 26.0 |
| 24                  | 23.0       | 25.10 | 27.0 |
| 25                  | 24.0       | 26.10 | 28.0 |
| 26                  | 25.0       | 27.10 | 29.0 |
| 27                  | 26.0       | 28.10 | 30.0 |
| 28                  | 27.0       | 29.10 | 31.0 |
| 29                  | 28.0       | 30.10 | 32.0 |
| 30                  | 29.0       | 31.10 | 33.0 |



DESCRIPTION(内容):  
**FPC 1.0mm H:2.8 NON-ZIF DIP 90° Dual Contact Type(軟排 t:0.3) (RoHS)**

PART NO:  
(料 號) **FPC228NX XX -N1TT**

DWG NO(圖號): **K810DL-DR-XX-PT-1-X**

DRAWN(製圖):  
**mandy**

CHECKED(確認):  
**MANDY**

APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:(公差)  
0.0 ±0.35  
0.00 ±0.20  
ANG. ±3°

SCALE(比例):  
**FREE**

REV: **R1**

UNIT:  
**mm**

SIZE:  
**A4**

SHEET:  
**1/1**

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| R0  | RELEASE     | 2013.10.21 |
| R1  | 更換確認章       | 2019.09.12 |
| R2  |             |            |
| R3  |             |            |