

1





2

3


1

2

3

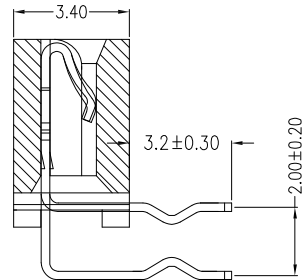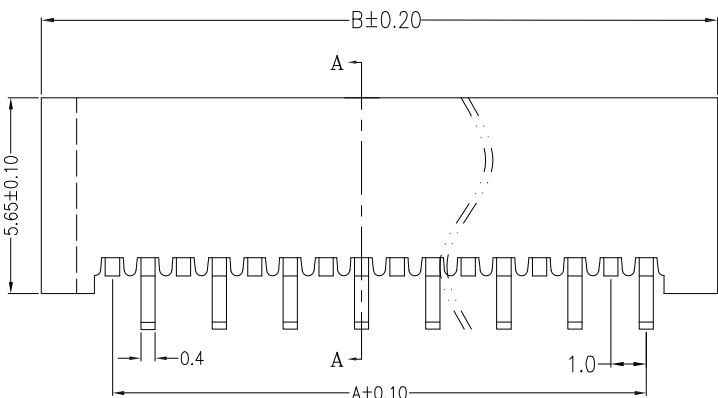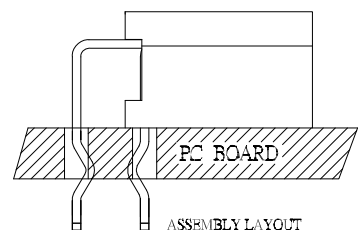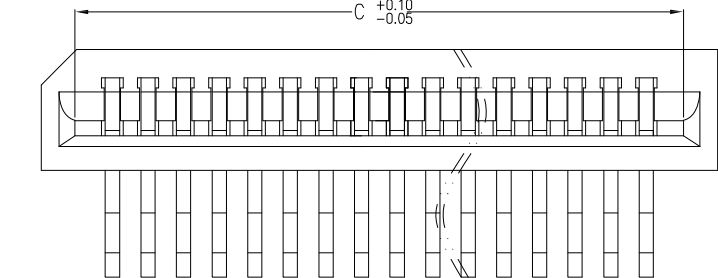


SEC:A-A

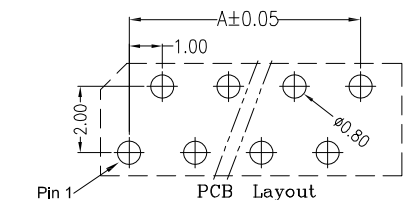


Normal type

P/N:FPC234N0 XX-ATT

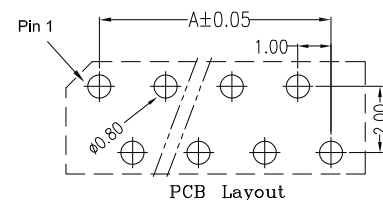

Reverse type

P/N:FPC234N1 XX-ATT

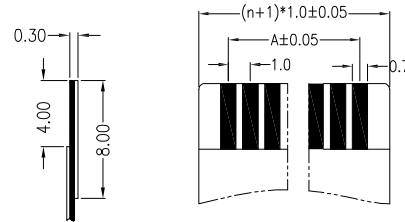

**SPECIFICATION:**

- Poles: 4~30
- Voltage rating:  
AC, DC, 50V(50HZ)
- Current rating:  
0.5A, AC/DC
- Withstand voltage:  
500V AC/minutes
- Working Temperature:  
-25°C~ +85°C
- Insulation resistance:>800MΩ
- Contact resistance:<0.02Ω
- Terminal material:  
Phosphor Bronze/Tin-Plated
- Housing material:  
PA46 UL94V-0,Color:Natural
- PACKING:TUBE

NO. of Contacts (n)	Dimensions		
	A	B	C
04	3.0	7.1	5.10
05	4.0	8.1	6.10
06	5.0	9.1	7.10
07	6.0	10.1	8.10
08	7.0	11.1	9.10
09	8.0	12.1	10.10
10	9.0	13.1	11.10
11	10.0	14.1	12.10
12	11.0	15.1	13.10
13	12.0	16.1	14.10
14	13.0	17.1	15.10
15	14.0	18.1	16.10
16	15.0	19.1	17.10
17	16.0	20.1	18.10
18	17.0	21.1	19.10
19	18.0	22.1	20.10
20	19.0	23.1	21.10
21	20.0	24.1	22.10
22	21.0	25.1	23.10
23	22.0	26.1	24.10
24	23.0	27.1	25.10
25	24.0	28.1	26.10
26	25.0	29.1	27.10
27	26.0	30.1	28.10
28	27.0	31.1	29.10
29	28.0	32.1	30.10
30	29.0	33.1	31.10



<b>DESCRIPTION(內容):</b> <b>FPC 1.0mm H:3.4 NON-ZIF DIP</b> <b>R/A Single Upper Type(軟排 t:0.3)</b> <b>(RoHS)</b> <b>PART NO:</b> (料號) <b>FPC234NX XX-ATT</b> <b>DWG NO(圖號):</b> K810SA-DRU-XX-PT-1-X	<b>DRAWN(製圖):</b> mandy <b>CHECKED(確認):</b> MANDY <b>APPROVAL(核准):</b> JOHNNY	<b>GENERAL TOLERANCE:(公差)</b> 0.0 ±0.35 0.00 ±0.20 ANG. ±3° <b>SCALE(比例):</b> FREE	<b>REV:</b> <b>R1</b> <b>UNIT:</b> mm <b>SIZE:</b> <b>A4</b> <b>SHEET:</b> <b>1/1</b>	<b>REV</b> <b>R0</b> <b>R1</b> <b>R2</b> <b>R3</b>	<b>DESCRIPTION</b> RELEASE 更換確認章	<b>DATE</b> <b>2013.10.25</b> <b>2019.09.12</b>
---	--	---	--	--	--	---