



FPC cable

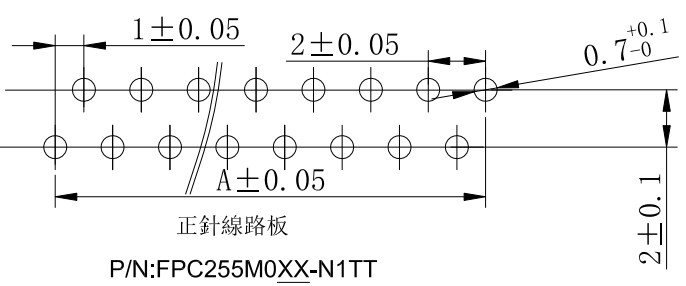

正針線路板

P/N: FPC255M0XX-N1TT

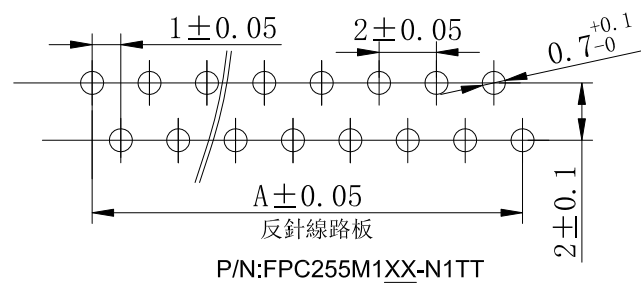

反針線路板

P/N: FPC255M1XX-N1TT

SPECIFICATION:

- Poles: 4~30
- Voltage rating:
AC, DC, 200V(50HZ)
AC, DC, 50V(200HZ)
- Current rating:
0.4A, AC/DC
- Withstand voltage:
200V AC/minutes
- Working Temperature:
-25°C ~ +85°C
- Insulation resistance > 500MΩ
- Contact resistance: < 0.02Ω
- Terminal material:
Phosphor Bronze/Tin-Plated
- Housing material:
PA9T UL94V-0, Color: Black
- Packing: Tube

NO. of Contacts (n)	Dimensions		
	A	B	C
04	3.0	5.10	7.0
05	4.0	6.10	8.0
06	5.0	7.10	9.0
07	6.0	8.10	10.0
08	7.0	9.10	11.0
09	8.0	10.10	12.0
10	9.0	11.10	13.0
11	10.0	12.10	14.0
12	11.0	13.10	15.0
13	12.0	14.10	16.0
14	13.0	15.10	17.0
15	14.0	16.10	18.0
16	15.0	17.10	19.0
17	16.0	18.10	20.0
18	17.0	19.10	21.0
19	18.0	20.10	22.0
20	19.0	21.10	23.0
21	20.0	22.10	24.0
22	21.0	23.10	25.0
23	22.0	24.10	26.0
24	23.0	25.10	27.0
25	24.0	26.10	28.0
26	25.0	27.10	29.0
27	26.0	28.10	30.0
28	27.0	29.10	31.0
29	28.0	30.10	32.0
30	29.0	31.10	33.0



DESCRIPTION(內容):
FPC 1.0mm H:5.5 NON-ZIF DIP Vertical Dual Contact Type(軟排 t:0.3) (RoHS)
 PART NO:
 (料號) **FPC255M X XX-N1TT**
 DWG NO(圖號): **K810DL-DV-XX-PT-1-X**

DRAWN(製圖):
GONG
 CHECKED(確認):
TERESA
 APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:(公差)
 0.0 ± 0.35
 0.00 ± 0.20
 SCALE(比例):
FREE

REV: **R1**
 UNIT: **mm**
 SIZE: **A4**
 SHEET: **1/1**

REV	DESCRIPTION	DATE
R0	RELEASE	2013.10.22
R1	2014年8月料號P數編碼統一兩碼	2018.09.04
R2		
R3		