




Reverse Type  
(Tolerance:0.05)  
Recommended PCB Layout

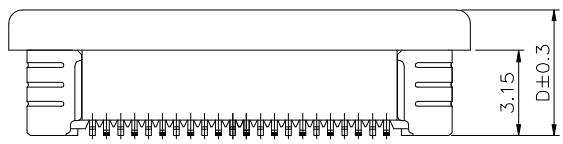


Specifications:  
Rating:  
Current Rating:0.5 Amp  
Voltage Rating:50V AC/DC  
Operating Temperature Range:-40°~+105°C  
Max Processing Temp.:260°C for 5 Seconds


Electrical:  
Contact resistance:40m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:200V AC/Minute

Material And Finish:  
Housing:LCP UL94V-0 Natural  
Cover(ZIF):LCP UL94V-0 Black  
Terminal:Phosphor Bronze,  
Fitting Nail:Copper Alloy With Tin Plated.  
Plating:Tin plated Over Nickel

**PART NO.:**  
**FPC320B0XX-CTT-CF1337**  
04 ~ 60 PIN      T:Tube Packing

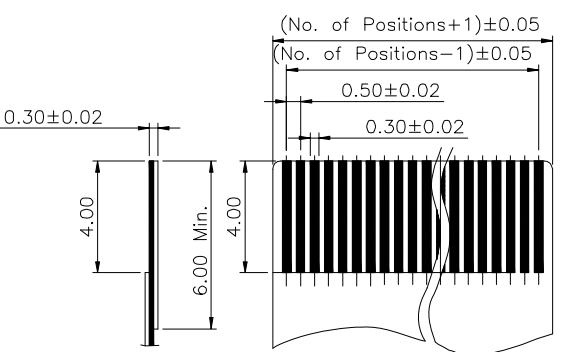

FFC/FPC Dimension(Thickness 0.30 mm)

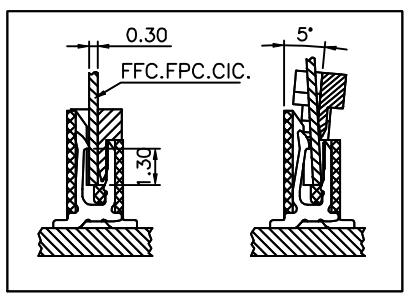

No.	A	B	C	D
04	1.50	2.65	8.40	
05	2.00	3.15	8.90	
06	2.50	3.65	9.40	
07	3.00	4.15	9.90	
08	3.50	4.65	10.40	
09	4.00	5.15	10.90	
10	4.50	5.65	11.40	
11	5.00	6.15	11.90	
12	5.50	6.65	12.40	
13	6.00	7.15	12.90	
14	6.50	7.65	13.40	
15	7.00	8.15	13.90	
16	7.50	8.65	14.40	
17	8.00	9.15	14.90	4.65
18	8.50	9.65	15.40	
19	9.00	10.15	15.90	
20	9.50	10.65	16.40	
21	10.00	11.15	16.90	
22	10.50	11.65	17.40	
23	11.00	12.15	17.90	
24	11.50	12.65	18.40	
25	12.00	13.15	18.90	
26	12.50	13.65	19.40	
27	13.00	14.15	19.90	
28	13.50	14.65	20.40	
29	14.00	15.15	20.90	
30	14.50	15.65	21.40	
31	15.00	16.15	21.90	
32	15.50	16.65	22.40	
33	16.00	17.15	22.90	
34	16.50	17.65	23.40	
35	17.00	18.15	23.90	
36	17.50	18.65	24.40	
37	18.00	19.15	24.90	
38	18.50	19.65	25.40	
39	19.00	20.15	25.90	
40	19.50	20.65	26.40	
41	20.00	21.15	26.90	
42	20.50	21.65	27.40	
43	21.00	22.15	27.90	
44	21.50	22.65	28.40	
45	22.00	23.15	28.90	5.15
46	22.50	23.65	29.40	
47	23.00	24.15	29.90	
48	23.50	24.65	30.40	
49	24.00	25.15	30.90	
50	24.50	25.65	31.40	
51	25.00	26.15	31.90	
52	25.50	26.65	32.40	
53	26.00	27.15	32.90	
54	26.50	27.65	33.40	
55	27.00	28.15	33.90	
56	27.50	28.65	34.40	
57	28.00	29.15	34.90	
58	28.50	29.65	35.40	
59	29.00	30.15	35.90	
60	29.50	30.65	36.40	



DESCRIPTION(內容):  
**FPC 0.5mm H:2.0**  
**W/ZIF Vertical SMT Type(RoHS)**  
PART NO:  
(料號) **FPC320B0XX-CTT-CF1337**  
DWG NO(圖號): **0005094-XX2321**

DRAWN(製圖):  
**GONG**  
CHECKED(確認):  
**TERESA**  
APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:  
(公差)  
. X ±0.20  
. XX ±0.10  
ANG. ±3°  
SCALE(比例):  
**FREE**

REV:  
**R3**  
UNIT:  
**mm**  
SIZE:  
**A4**  
SHEET:  
**1/1**

REV	DESCRIPTION	DATE
<b>R0</b>		<b>2018.04.18</b>
<b>R1</b>	新增Ⓐ尺寸	<b>2018.05.30</b>
<b>R2</b>	變更包裝選項	<b>2018.11.21</b>
<b>R3</b>	變更PIN位定義	<b>2019.01.16</b>