




# SPECIFICATIONS

## Electrical

Current Rating: 1A AC, DC  
 Voltage Rating: 50V AC/ max.  
 Operating Temp.: -25°C ~ +85°C  
 Insulation Resistance: 100MΩ/ min.  
 Dielectric Withstanding Voltage: 500V AC/ min.  
 Contact Resistance: 20mΩ/ max.

## Material

Material: PBT, UL94V-0

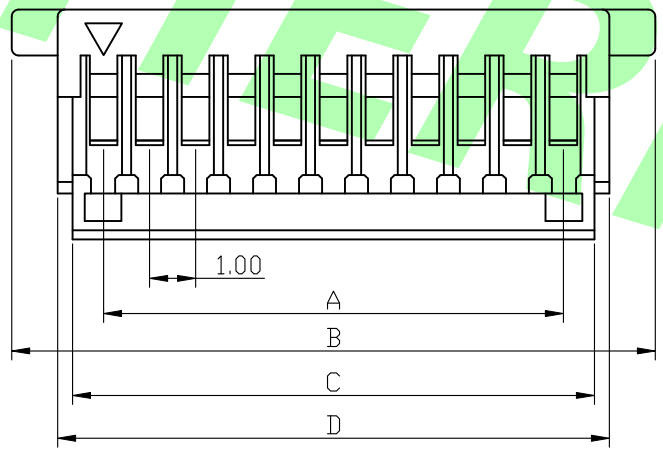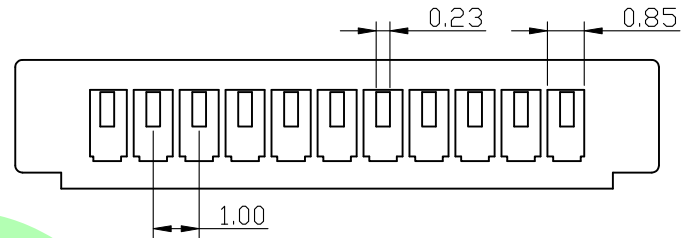

B尺寸公差如下:  
 2P~10P±0.10mm  
 11P~20P±0.20mm

所有材料為  
 "環保材料"  
 2006.08.09  
 RoHS

| Poles | Dimension mm |      |       |       | Note. |
|-------|--------------|------|-------|-------|-------|
|       | A            | B    | C     | D     |       |
| 02    | 1.0          | 5.0  | 2.37  | 3.00  |       |
| 03    | 2.0          | 6.0  | 3.37  | 4.00  |       |
| 04    | 3.0          | 7.0  | 4.37  | 5.00  |       |
| 05    | 4.0          | 8.0  | 5.37  | 6.00  |       |
| 06    | 5.0          | 9.0  | 6.37  | 7.00  |       |
| 07    | 6.0          | 10.0 | 7.37  | 8.00  |       |
| 08    | 7.0          | 11.0 | 8.37  | 9.00  |       |
| 09    | 8.0          | 12.0 | 9.37  | 10.00 |       |
| 10    | 9.0          | 13.0 | 10.37 | 11.00 |       |
| 11    | 10.0         | 14.0 | 11.37 | 12.00 |       |
| 12    | 11.0         | 15.0 | 12.37 | 13.00 |       |
| 13    | 12.0         | 16.0 | 13.37 | 14.00 |       |
| 14    | 13.0         | 17.0 | 14.37 | 15.00 |       |
| 15    | 14.0         | 18.0 | 15.37 | 16.00 |       |
| 16    | 15.0         | 19.0 | 16.37 | 17.00 |       |
| 17    | 16.0         | 20.0 | 17.37 | 18.00 |       |
| 18    | 17.0         | 21.0 | 18.37 | 19.00 |       |
| 19    | 18.0         | 22.0 | 19.37 | 20.00 |       |
| 20    | 19.0         | 23.0 | 20.37 | 21.00 |       |

承洧科技股份有限公司  
 Cherg Wee Technology Corp.

DESCRIPTION(內容):  
**1.0mm Wire-to-Board Housing**  
 PART NO:  
 (料號) **CSH-H10-XX**  
 DWG NO(圖號): **1000-XX**

DRAWN(製圖):  
**Shih**  
 CHECKED(確認):  
**MANDY**  
 APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:  
 (公差)  
 X.XX ± 0.1  
 X.X ± 0.25  
 SCALE(比例):  
**FREE**

REV: **R2**  
 UNIT: **mm**  
 SIZE: **A4**  
 SHEET: **1/1**

| REV | DESCRIPTION     | DATE       |
|-----|-----------------|------------|
| R0  | 環保料             | 2006.08.09 |
| R1  | 修改接觸阻抗單位        | 2007.04.04 |
| R2  | 2014年料號Pin數編碼統一 | 2014.10.09 |
| R3  |                 |            |