

P. C. B Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/NL-6T/LCP
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P10X	X	X	X	A / B	X X
(Pin Header Single Row)	R:Right Angle Type (Down Angel Type) R1:1.5mm ⋮	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T C:LCP (Standard:P)	A (060) B (030) (If you desire on other length, by marking put desired in the A/B)	(01 TO 40 Contacts)

Selectivity:

- P101 (H:2.54 W:2.54) (Material (Sandard) :PBT)
- P102 (H:1.7 W:2.54) (Material (Sandard) :Nylon-6T)
- P103 (H:1.5 W:2.54) (Material (Sandard) :Nylon-6T)

Dim(6.0/3.0):

A: _____ B: _____

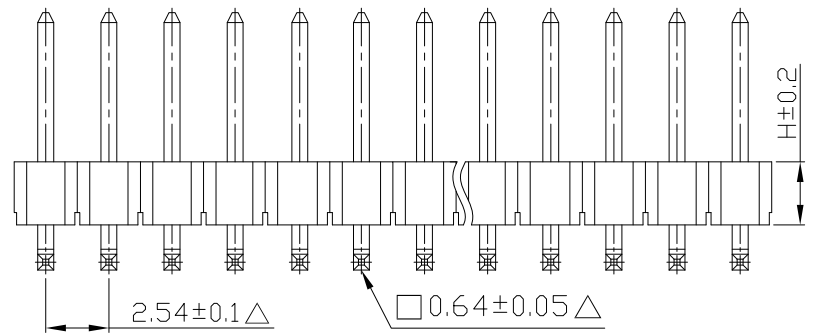

CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):
2.54mm Pin Header H:2.54 90° □=0.64 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XX

REV: **A/1**

UNIT: **mm**

SIZE: **A4**

SHEET: **1/1**

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	
2		
3		
4		