

P.C.B Hole Layout

### Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: PBT
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

### How to order



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P10X	X	X	X	A / B	X X
(Pin Header Single Row)	S: Straight Type ⋮	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold © Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:P)	A (060) B (030) (If you desire on other length, by marking put desired in the A/B)	(01 TO 40 Contacts)

### Selectivity:

- P101 (H:2.54 W:2.54) (Material (Sandard):PBT)
- P102 (H:1.7 W:2.54) (Material (Sandard):Nylon-6T)
- P103 (H:1.5 W:2.54) (Material (Sandard):Nylon-6T)

### Dim(6.0/3.0):

A: \_\_\_\_\_ B: \_\_\_\_\_

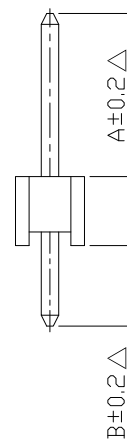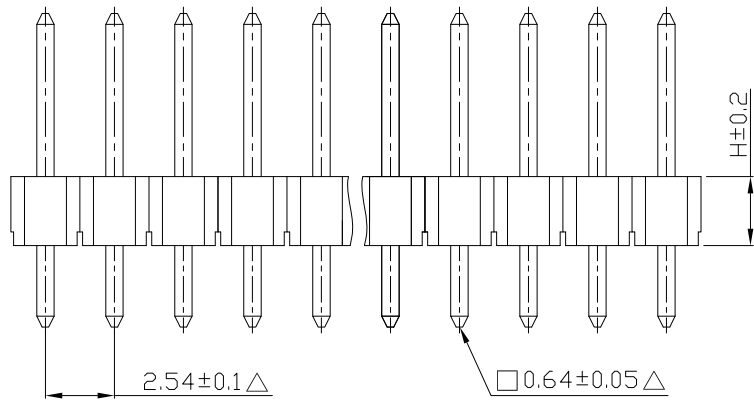

DESCRIPTION(内容):  
**2.54mm Pin Header H:2.54 180° □=0.64 (RoHS)**

PART NO:  
(料 號)  
 DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:  
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):

1:XX



REV:  
A/3

UNIT:  
mm

SIZE:  
A4

SHEET:  
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE