



P. C. B Hole Layout

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P20X</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A</u> / <u>B</u>	- <u>XX</u>
(Pin Header Dual Row)	R: Right Angle Type R1: 1.5mm	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	p: PBT N: Nylon-6T (Standard:P)	A (060) B (030) (If you desire on other length, by marking put desired in the A/B)	(04 TO 80 Contacts)
P201 (H: 2.54 W: 5.08) :					

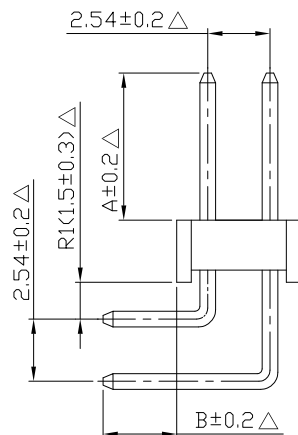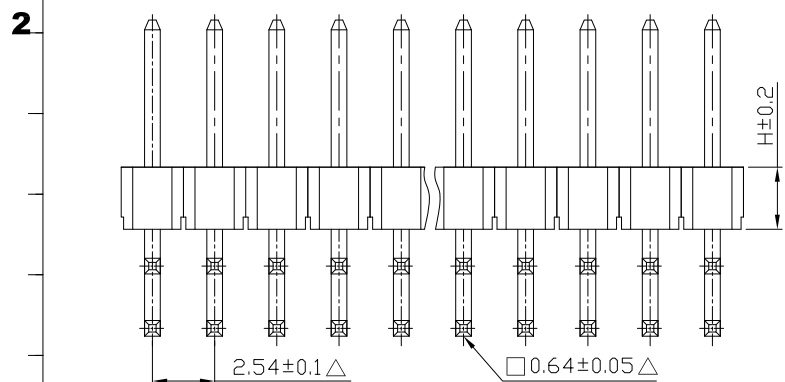

Selectivity:

- P201 (H: 2.54 W: 5.08) (Material (Standard): PBT)
- P202 (H: 1.7 W: 5.08) (Material (Standard): Nylon-6T)
- P203 (H: 1.5 W: 5.08) (Material (Standard): Nylon-6T)

Dim(6.0/3.0) :

A: _____ B: _____



DESCRIPTION(内容):
2.54mm Pin Header H:2.54 90° □=0.64 (RoHS)

PART NO:
(料 號)
DWG NO(圖號):

DRAWN(製圖):


CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X.° ±5.0°
.X ±0.20 .X° ±3.0°
.XX ±0.15 .XX° ±1.0°

SCALE(比例):
1:XX



REV:
A/3

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE