
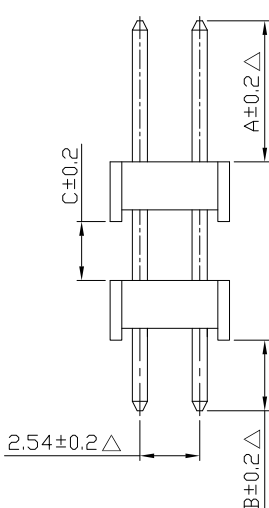


Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: P. B. T/NL-6T/LCP
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length	mm	Number of Contacts
P22X	- X	X	X	A / C / B		X X
(Pin Header Dual Row)	S: Straight Type	G: Gold Flash T: Tin Plated	P: PBT N: Nylon-6T C: LCP (Standard: P)	A (060)	C (025)	B (030)
P221 (H: 2.54 W: 5.08)	⋮	A: 10U"Gold B: 15U"Gold C: 20U"Gold	(If you desire on other length, by marking put desired in the A/C/B)			(04 TO 80 Contacts)
		©Duplex Plating D: Gold Flash/Tin (Standard: G)				

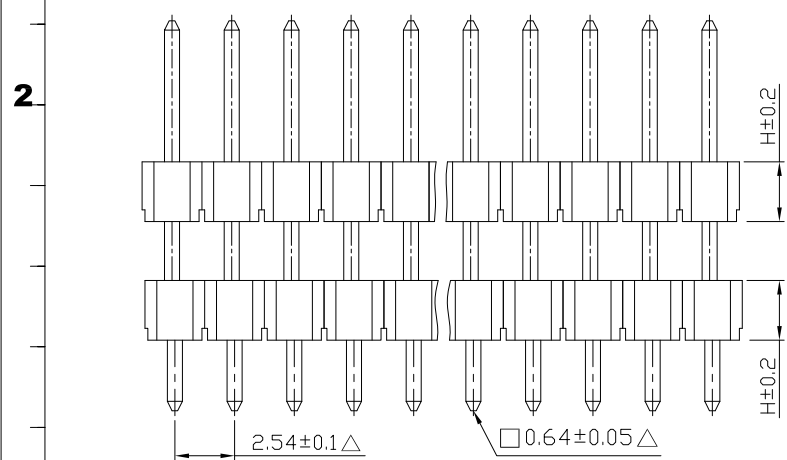

Selectivity:

- P221 (H: 2.54 W: 2.54) (Material (Standard): PBT)
- P222 (H: 1.7 W: 2.54) (Material (Standard): Nylon-6T)
- P223 (H: 1.5 W: 2.54) (Material (Standard): Nylon-6T)

Dim (6.0/2.5/3.0) :

A: _____ C: _____ B: _____



DESCRIPTION(內容):
2.54mm Pin Header H:2.54 180° □=0.64
雙塑雙排 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XX

REV: A/1

UNIT: mm

SIZE: A4

SHEET: 1/1

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	
2		
3		
4		