

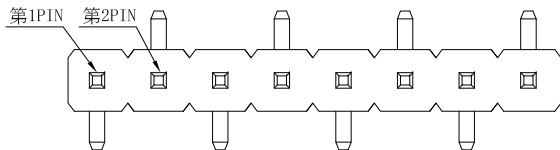



A TYPE

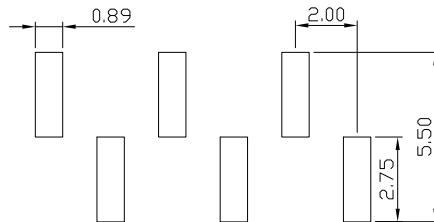

B TYPE

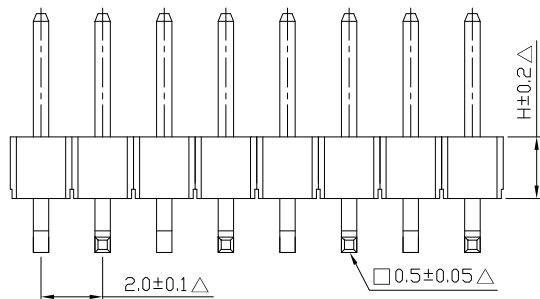


A TYPE

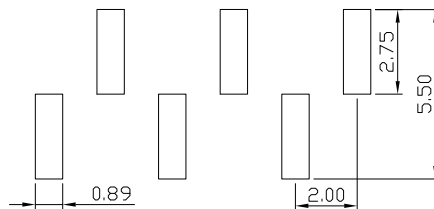

B TYPE

P.C.B Hole Layout



Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40℃ ~ +105℃
Solsering Temperature	:260℃ for 3~5sec Max.
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over
Note:	
Duplex Plating:	Gold Plated on contact area, Tin on solder area

How to order

Series	Connector Type	Contact Plating	Material	Pin Length	mm	Number of Contacts	A、B TYPE
P30X	X	X	X	A		X X	XT
(Pin Header Single Row)	M:SMT Type M0:1.50mm M4:0.25mm M6:0.50mm M8:1.00mm ...	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	A (040)		(02 TO 40 Contacts)	AT: A Type BT: B Type

Selectivity:

- ☐ P303 (H:2.0 展開:4.5) (Material (Sandard):Nylon-6T)
- ☐ P305 (H:1.5 展開:4.0) (Material (Sandard):Nylon-6T)

Dim(4.0):

A: _____



CHERNG WEEI

DESCRIPTION(内容):

2.0mm Pin Header H:2.0 SMT □=0.50 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):

1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE