
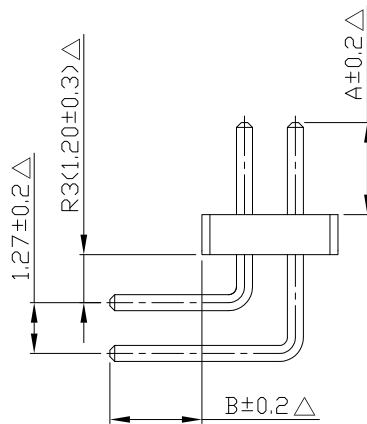


P. C. B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

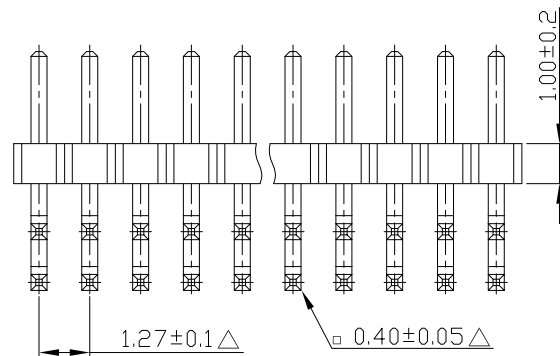

How to order

Series	Connector Type	Contact Plating	Material	Pin Length	mm	Number of Contacts
<u>P605</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A / B</u>	-	<u>XX</u>
(Pin Header Dual Row) P605 (H: 1.0 W: 3.4)	R: Right Angle R3: 1.2mm ⋮	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T P: PBT C: LCP (Standard: N)	A (023)	B (023)	(04 TO 100 Contacts)
				(If you desire on other length, by marking put desired in the A/B)		

Dim(2.3/2.3):

A: _____ B: _____



DESCRIPTION(内容):
1.27mm Pin Header H:1.0 90° □=0.40 (RoHS)

PART NO:
(料 號)
DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE