



Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5s Max.
Contact Material	: Brass
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard	: Nylon-6T/LCP
Finish	: Tin, Gold Plated
Standard	: Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length	Number of Contacts	Other
P804	X	X	X	A	X X	P
(Pin Header Dual Row) P804 (H: 1.0 W: 3.17 展開4.5)	M: SMT Type M1: 0.15mm ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	A A (018) (If you desire on other length, by marking put desired in the A)	(04 TO 100 Contacts)	P: PEG

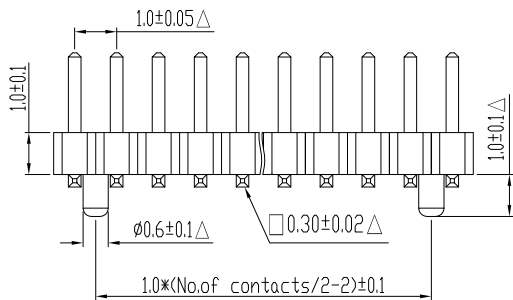

Dim(1.8):

A: _____



DESCRIPTION(内容):
1.0mm Pin Header H:1.0 SMT □=0.30 PEG (RoHS)

PART NO:
(料 號)
DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE