


PCB EDGE
PCB LAYOUT
(COMPONENT SIDE)



Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

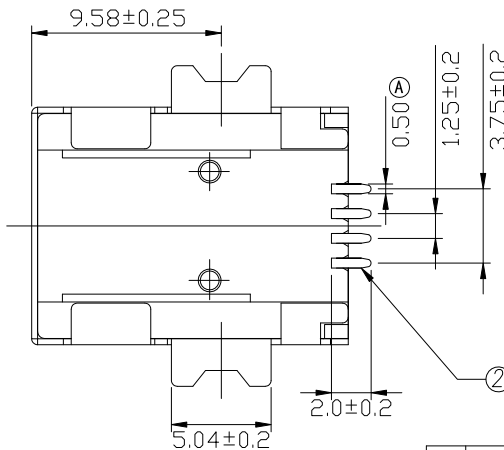

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T GF.	WHITE BLACK	1	P/N: UBF-041MGN1W-CF254 P/N: UBF-041MGN1B-CF254
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:50u" MINIMUM



DESCRIPTION(內容):
USB B TYPE FLAT 4 PIN SMT (RoHS)
 DRAWN(製圖):
GONG
 CHECKED(確認):
TERESA
 APPROVAL(核准):
JOHNNY
 PART NO:
 (料號) **UBF-041MGN1X-CF254**
 DWG NO(圖號): **KS-001H-BX-L**

GENERAL TOLERANCE:
 (公差)
 .X ±0.25
 .XX ±0.15
 SCALE(比例):
FREE

REV	DESCRIPTION	DATE
R3		
R0	RELEASE(RoHS)	2005.05.12 2006.09.06
R1	2007年USB SERIES料號轉換	2007.11.07
R2	修改尺寸(A) 補充公差.尺寸.Specification	2009.02.18
R3	變更外殼電鍍膜厚	2016.12.08